




GIBSON

valves

**Butterfly
valves**

**SOFT
Seated**

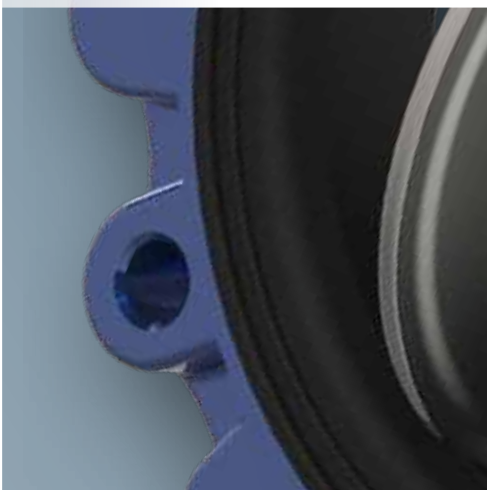



Butterfly valves

SOFT SEATED

BVPD - Wafer BLPD - Lug
DN 80 - 500 · 3" - 20" P max: **10 Bar**
DN 600 - 800 · 24" - 32" P max: **6 Bar**
Soft seated butterfly valves designed for low pressures and powder convey

BVKI - Wafer BLKI - Lug
DN 40 - 800 · 1" 1/4 - 32"
Soft seated butterfly valves
P max: **16 Bar** designed for all applications

BVKA - Wafer BLKA - Lug
DN 40 - 800 · 1" 1/4 - 32"
Soft seated butterfly valves
P max: **20 Bar**

BVKX - Wafer BLKX - Lug
DN 50 - 250 · 2" - 10"
Soft seated butterfly valves
P max: **25 Bar**



GIBSON Soft seated butterfly valves are designed to meet with most industrial applications, from powder conveyance to petrochemical requirements.

The valves are manufactured in four different versions with sizes from DN 40 to DN 800, pressures up to 25 bar and many different materials.

We can supply valves

- manually operated (with levers or gearboxes)
- pneumatically operated (with double or single acting actuators)
- electrically or hydraulically operated

We also offer special solutions in many different materials.

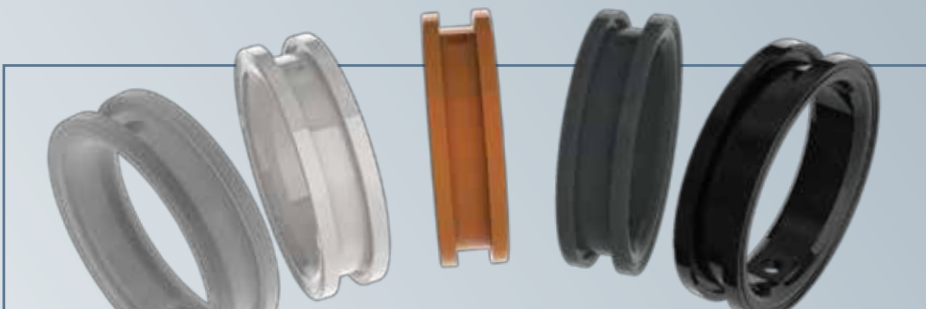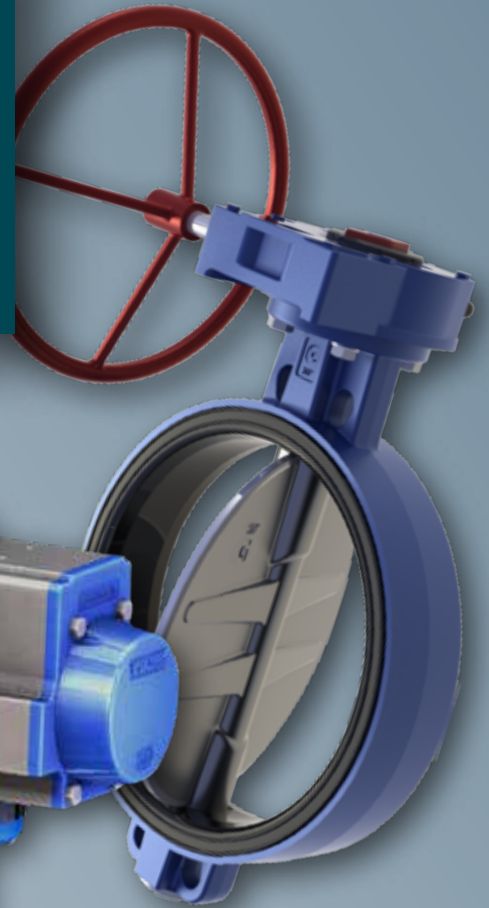


Wide range of elastomers

A very wide range of elastomers allows the best combination of materials depending on the different applications




Detail of shaft-disc connection

Valves over DN300 have a special designed shaft-disc connection which ensures a strong coupling while avoiding clearances and gives higher shaft tensile capacity thanks to the section considerably larger than the classic square section.

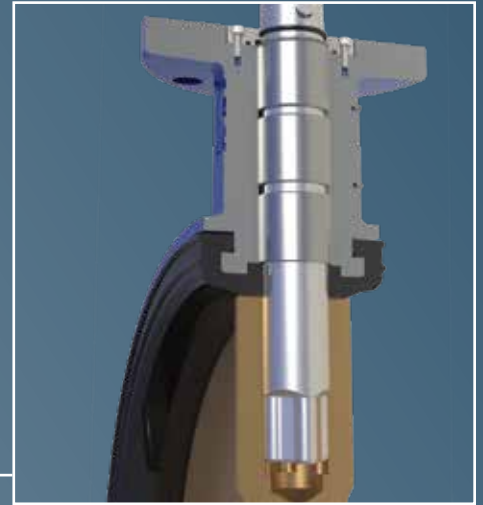

Special shaft double packing

Sealing outwards is ensured by a double packing at the top and at the bottom of the shaft.

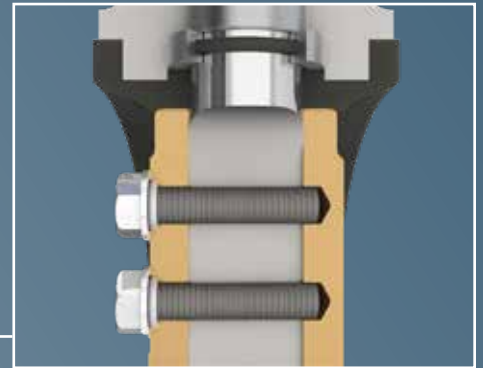


Detail of lower support

The adjustable lower support prevents the shaft-disc unit to move along the axis. Furthermore when the valve is assembled with vertical shaft, the disc does not weigh on the seat with a longer duration of valve life.



All GIBSON butterfly valves have anti-blow out system for the shafts in compliance with EN736 and API609 standards

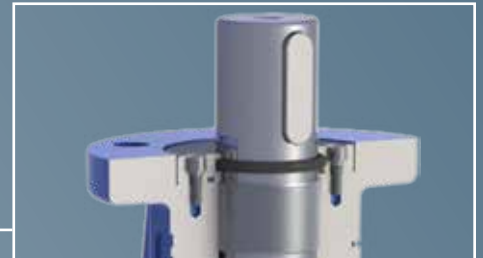


Detail of shaft-disc fastening

For valves over DN500 this solution allows a strong fastening without clearances and easy maintenance.



Detail of replaceable body seat

Its shape ensures the best anchoring to the body even in hard applications.

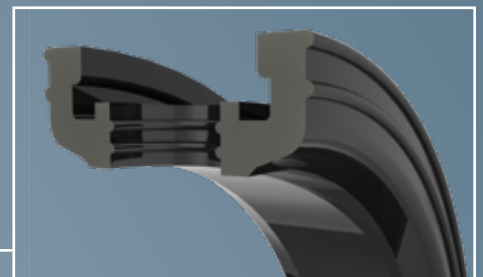



Butterfly valves

SOFT SEATED

Ghibson soft seated butterfly valves (PD, KI, KA and KX series) are designed to fit in industrial applications from powder conveyance to marine and petrochemical requirements.

They are manufactured in different versions and materials and for working pressures from 6 to 25 Bars.



PD, KI Series

- technical data
- components DN 80-300
- components DN 350-500
- components DN 600-800

KA, KX technical data

- technical data

KA series

- components DN 40-300
- components DN 350-400
- components DN 450-500
- components DN 600-800

KX series

- components DN 50-250

PD, KI, KA Series

- dimensions tables

BVKX, BLKX Series

- dimensions tables

Torque values tables

Head losses tables

Flanges

Bolts and rods dimensions

Installation instructions

Handlever

Gearbox

- aluminium body
- cast iron body

Actuators and coupling

- pneumatic actuators
- declutchable gearboxes
- hydraulic actuators

1
1
2
3
4
5
5
6
6
7
8
9
10
10
11
11
12
12
13
14
15
16
17
18
19
19
20
21
21
23
24

GHIBSON

Zola Predosa
Bologna

Ghibson Italia srl reserves the right to change and/or update data/content without previous notice.



BVPD - Wafer BLPD - Lug
DN 80 - 800 • 3" - 32"

BVKI - Wafer BLKI - Lug
DN 40 - 800 • 1 1/2" - 32"

Max working pressure:

BVPD/BLPD DN80÷500: **10 Bar**
 BVPD/BLPD DN600÷800: **6 Bar**
Flange: PN 6-10-16 • A150

BVKI/BLKI DN40÷500: **16 Bar**
Flange: PN 10-16 • A150

BVKI/BLKI DN600÷800: **10 Bar**
Flange: PN 10-16 • A150

KI series to be used also with vacuum

Design:

EN 593 ~ EN 736 ~ EN 12516 ~ EN 1092
 ISO 5211 ~ DIN 3337 ~ API 609
 PED 2014/68/EU - Mod. H

Face to face:


DIN EN 558 Series 20 ~ ISO 5752 Series 20
 BS-5155 Series 4 ~ MSS-SP67
 API609 cat.A ~ NFE 29305-1

Testing:

EN 12266-1 Rate A (supersedes DIN 3230)
 ISO 5208 Rate A ~ API 598

Tag:

EN 19 ~ MSS SP-25

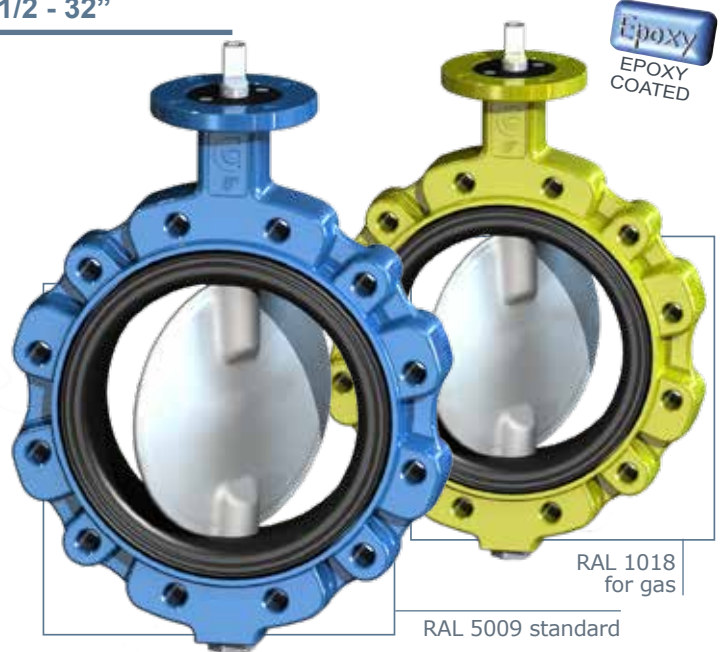

All valves are supplied with a metallic label in compliance with PED directive.

BODY			BVPD	BVKI/BLKI
material	references	standard coating	DN	DN
Ductile iron	EN-GJS 400-15 (GS400)	Epoxy RAL 5009	80-800	40-800
Carbon steel	ASTM A216-WCB	Epoxy RAL 9005	80-800	40-800
Stainless steel	ASTM A351 CF8M (A316)	-	80-800	40-800
Aluminium-bronze	ASTM B148-C958.00	-	80-800	40-800
Aluminium (P _{max} 10Bar)	EN AB 46400	Epoxy RAL 7024	80-500	40-500 only wafer

DISC			BVPD	BVKI/BLKI
material	references	standard coating	DN	DN
Steel	ASTM A105	Zinc	-	50-100
Ductile iron	EN-GJS 400-15 (GS400)	Zinc	150-500	125-500
Stainless steel	ASTM A351 CF8M (A316)	-	80-800	40-800
Aluminium-bronze	ASTM B148-C958.00	-	80-800	40-800
Hastelloy®	ASTM A494 CX2MW	-	80-800	40-800
Super Duplex	EN 1.4469 (A890 Gr. 5A)	-	80-800	40-800


BODY RUBBER SEAT		DN 40/500 replaceable - DN 600/800 vulcanized not replaceable					
ref.	designation	PD 6bar	PD 10bar	KI	trade name	working temp.	applications
NBR	nitrile rubber	✓	✓	✓	BUNA®	-25°C / +100°C	oils, hydrocarbons, gas, air, water
EPDM	copolymer EPDM	✓	✓	✓	-	-35°C / +130°C	water, sea water, steam, diluted acids
EPDM HT	copolimery EPDM HT	✓	✓	✓	-	-40°C / +150°C	water, sea water, steam, diluted acids
CO	carboxide	✓	✓	✗	-	-25°C / +100°C	dust, air
FKM	fluoroelastomer	✓	✗	✓	VITON®	-20°C / +200°C	oils, acids, hydrocabons
CR	polychloroprene	✓	✗	✓	NEOPRENE®	-20°C / +100°C	alkali, bases, water
NR	natural rubber	✓	✗	✓	-	-40°C / + 80°C	glycols, abrasive media
MVQ	silicon rubber	✓	✗	✓	SILOPREN®	-60°C / +190°C	water, food, drinks
CSM	chlorosulfonated polyethylene	✓	✗	✓	HYPALON®	-20°C / +125°C	acids, mineral bases, alcohols, hydrocarbons
PU	poliuretane	✓	✓	✓	POLIURETANE®	-25°C / +90°C	abrasive media

On request can be supplied other materials as:
 Coating on request:

LCB, Hastelloy, Uranus, Alloy, Super Duplex, Special steels, Special bronzes.
 RILSAN®, Halar®, Chenisil®

BVPD-Wafer BLPD-Lug
DN 80 - 300 • 3" - 12"
PN 6-10-16 • ANSI 150

BVKI - Wafer BLKI - Lug
DN 40 - 300 • 1 1/2" - 12"
PN 10-16 • ANSI 150

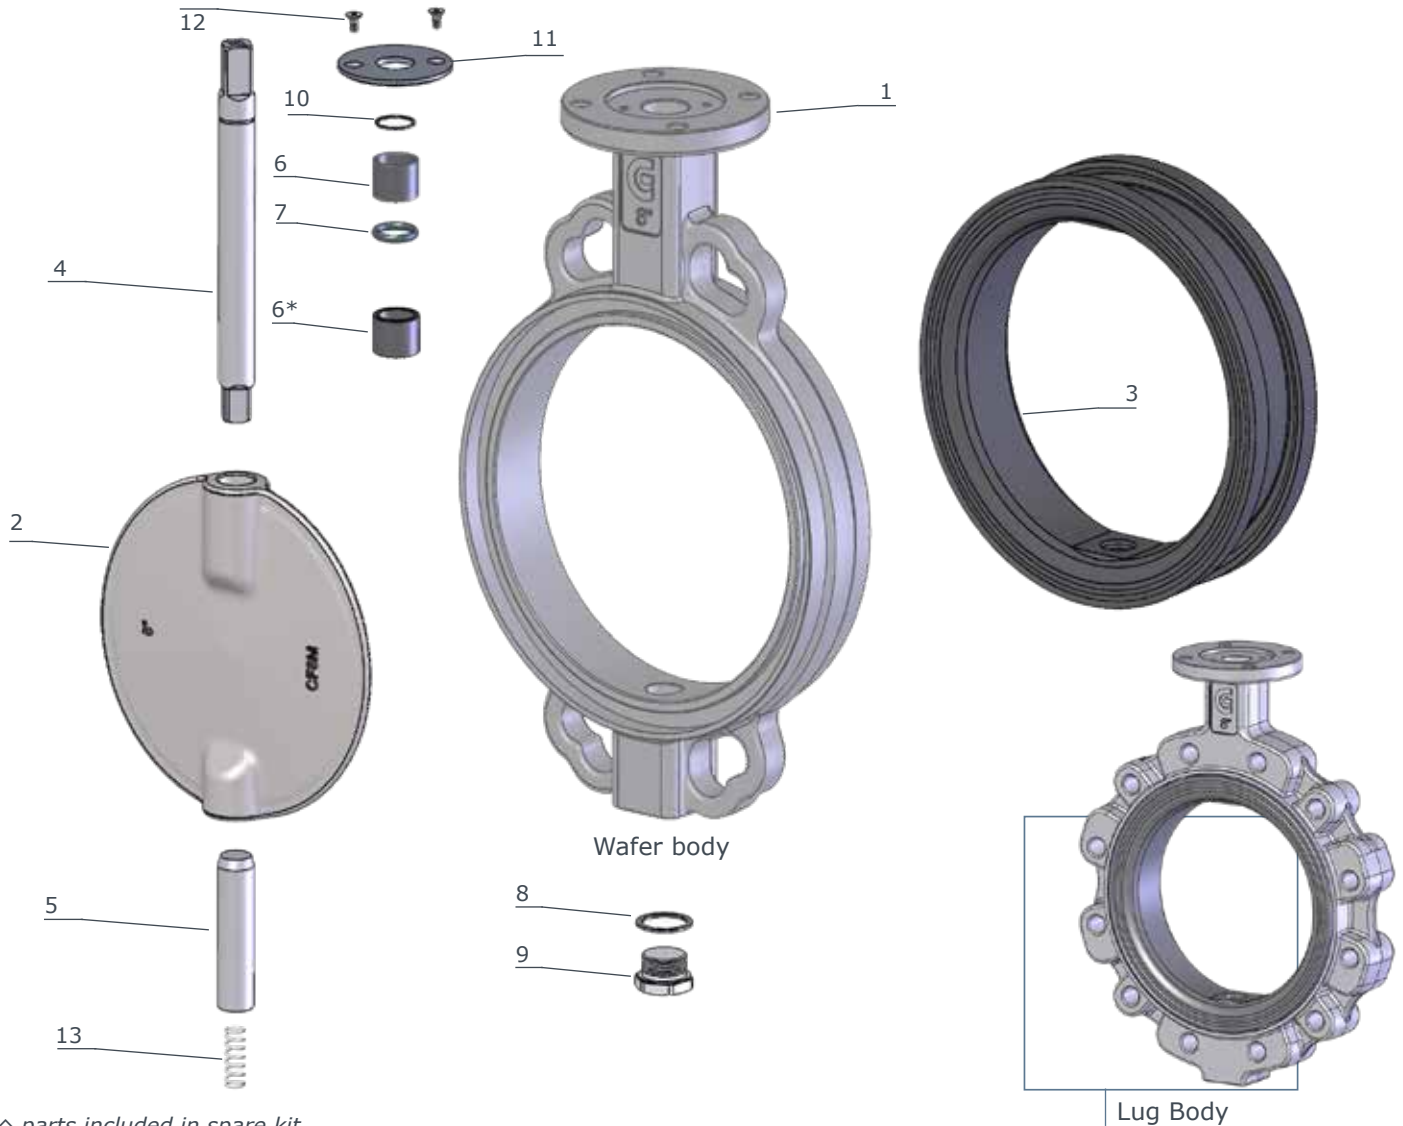

◇ parts included in spare kit


item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB 1.4408~ A351-CF8M (AISI 316) EN1982-CC333G~ASTM B148 -C958.00 EN AB 46400 (only WAFER)
2	1	disc	EN-GJS400-15 (GS400) EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
◇3	1	body seat (replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®) carboxide polychloroprene (NEOPRENE®) natural rubber silicon
4	1	upper shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)

* only for DN300

item	q.ty	part	material
5	1	lower shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
◇6	1	bush	bronze
◇6*	3	bush	A105+PTFE A316+PTFE (only Inox body)
◇7	1	shaft packing	NBR (BUNA®) FKM (VITON®) on request
8	1	plug packing	aluminium PTFE (CF8M body / ASTM B148)
9	1	threaded plug	zinc plated steel 1.4401~A316 (CF8M body / ASTM B148)
10	1	stop ring	steel
11	1	upper flange	IXEF (DN 40-150) aluminium (DN 200-300)
12	2	screw	10.9 zinc plated steel A4~A316 (CF8M body / ASTM B148)
13	1	spring	1.4401 ~ A316 (antistatic device)

BVPD-Wafer BLPD-Lug
DN 350 - 500 • 14" - 20"
PN 6-10-16 • ANSI 150

BVKI - Wafer BLKI - Lug
DN 350 - 500 • 14" - 20"
PN 10-16 • ANSI 150

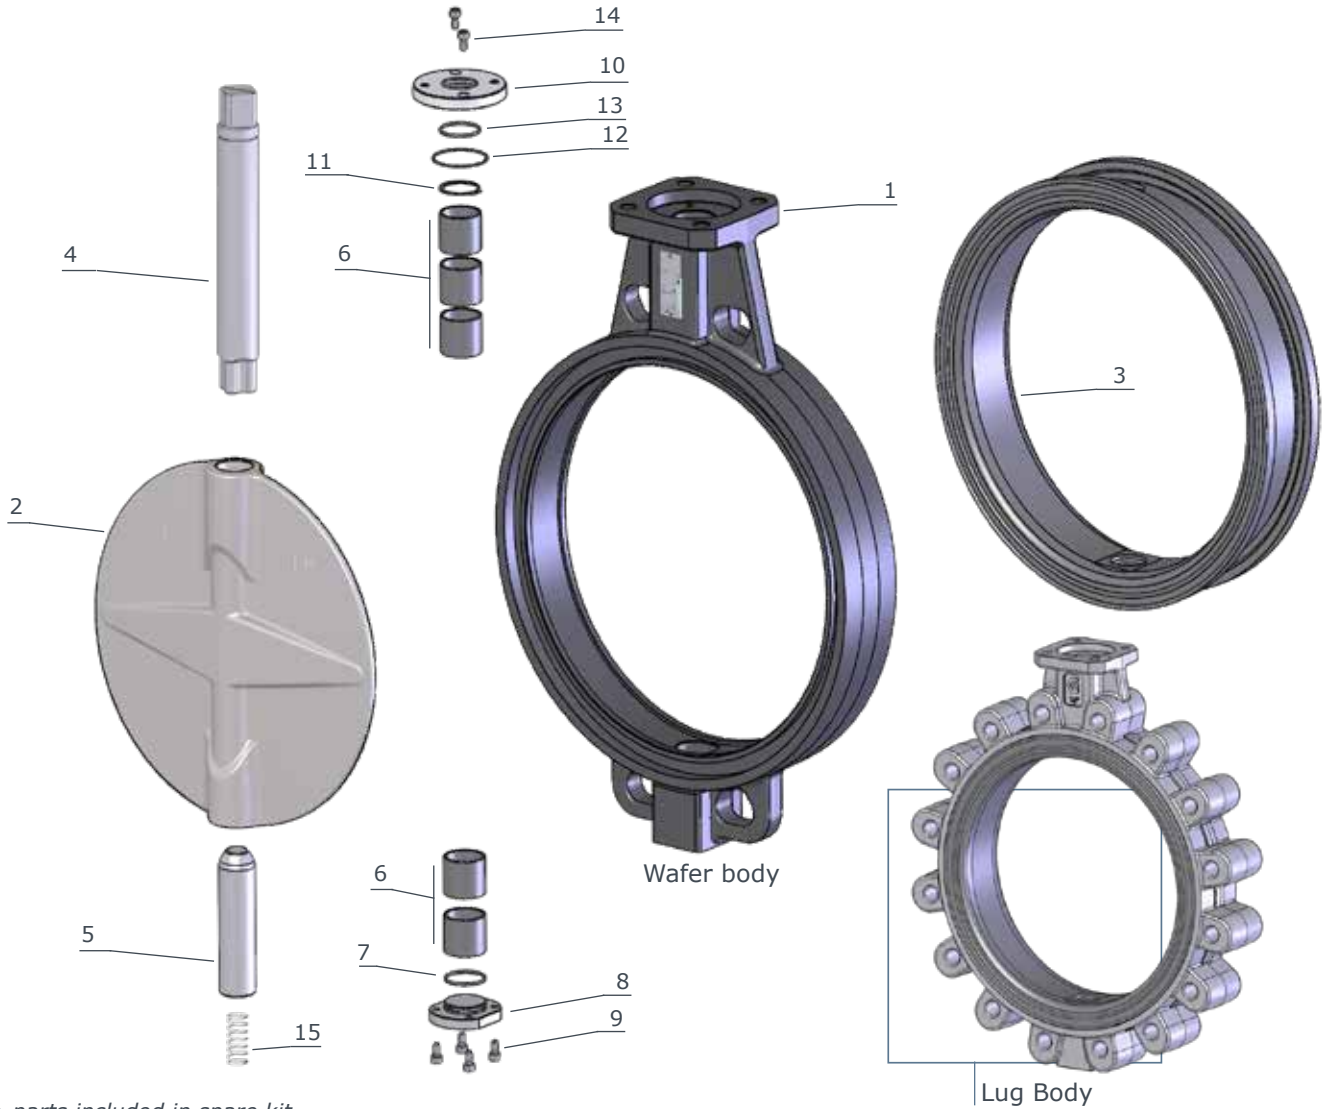


◇ parts included in spare kit

item	q.tà	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB 1.4408~ A351-CF8M (AISI 316) EN1982-CC333G~ASTM B148 - C958.00 EN AB 46400 (only WAFER)
2	1	disc	EN-GJS400-15 (GS400) EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
◇3	1	body seat (replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®) carboxide polychloroprene (NEOPRENE®) natural rubber silicon
4	1	upper shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)

item	q.tà	part	material
5	1	lower shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
◇6	5	bush	bronze steel+PTFE (DN 450-500)
◇7	1	packing lower flange	NBR (BUNA®)
8	1	lower flange	zinc plated steel 1.4401~A316 (CF8M body / ASTM B148)
9	4	screw	8.8 zinc plated steel A4~A316 (CF8M body / ASTM B148)
10	1	upper flange	zinc plated steel 1.4401~A316 (CF8M body / ASTM B148)
11	1	stop ring	steel
◇12	1	O.Ring	NBR (BUNA®)
◇13	1	O.Ring	NBR (BUNA®)
14	2	screw	8.8 zinc plated steel A4~A316 (CF8M body / ASTM B148)
15	1	spring	1.4401 ~ A316 (antistatic device)

BVPD-Wafer BLPD-Lug
DN 600 - 800 • 24" - 32"
PN 6-10-16 • ANSI 150

BVKI - Wafer BLKI - Lug
DN 600 - 800 • 24" - 32"
PN 10-16 • ANSI 150

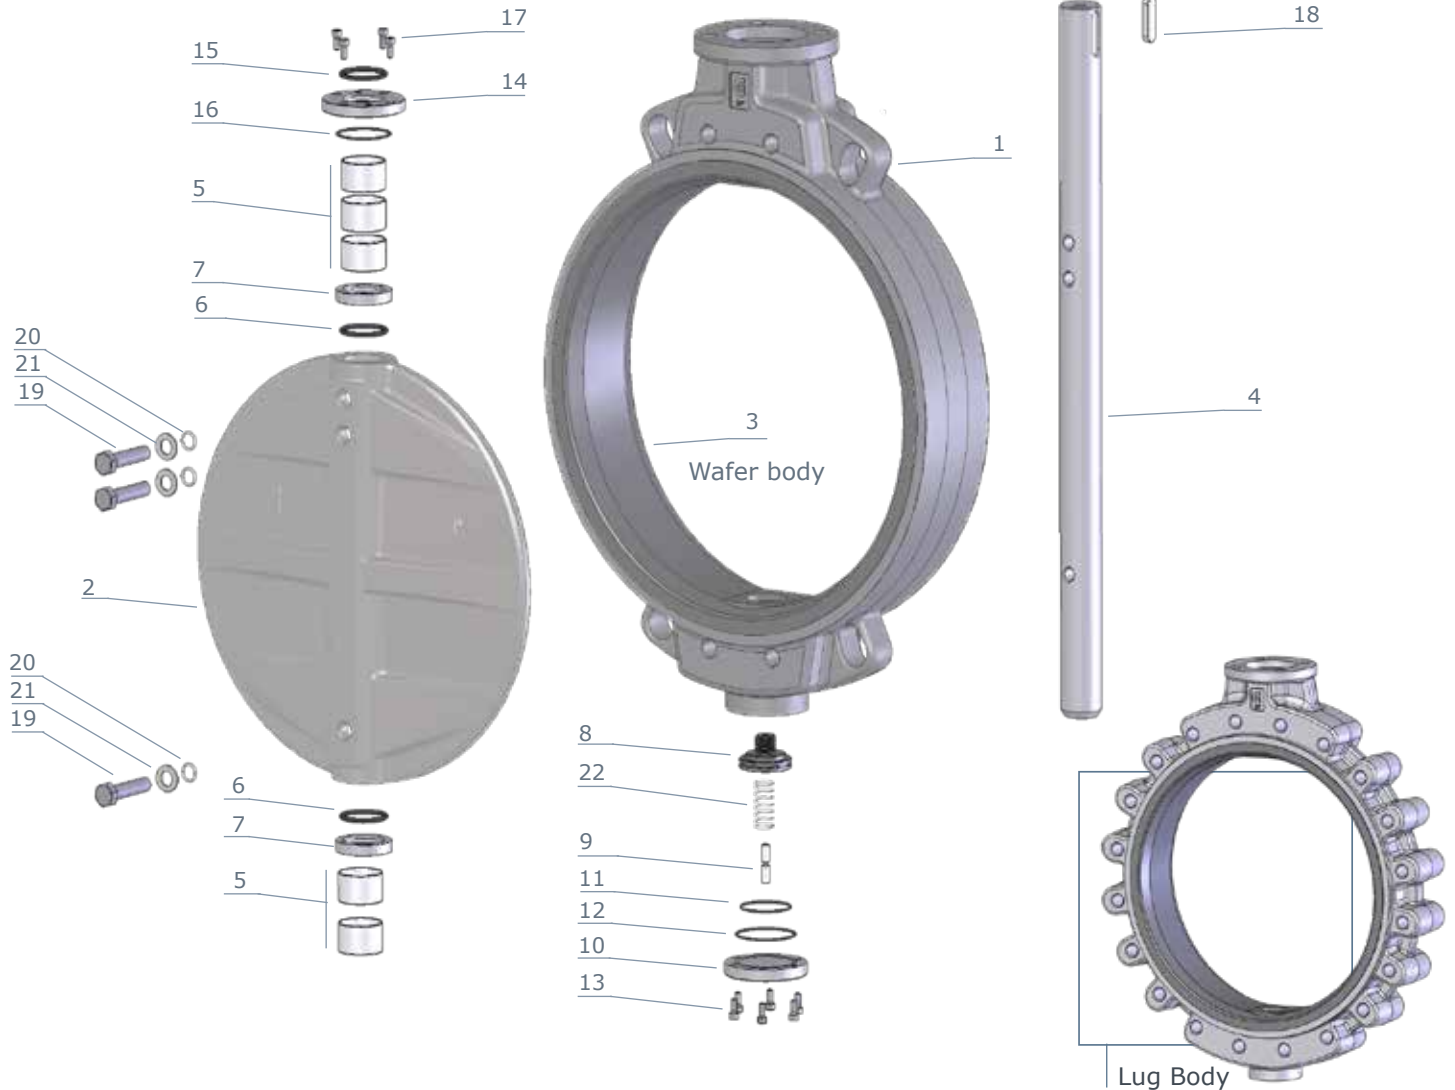

◇ parts included in spare kit

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB 1.4408~ A351-CF8M (AISI 316) EN1982-CC333G~ASTM B148 - C958.00
2	1	disc	EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	shaft	EN 1.4305~A303 EN 1.4401~A316 (on request)
◇5	5	bush	steel + PTFE
◇6	2	shaft O-ring	NBR (BUNA®) FKM (VITON®) on request
7	2	O-ring housing	A4~A316

item	q.ty	part	material
8	1	shaft support	Bronze
9	2	adjusting screw	A4~A316
10	1	lower flange	zinc plated steel 1.4401~A316 (CF8M body / ASTM B148)
◇11	1	O-ring	NBR (BUNA®)
◇12	1	O-ring	NBR (BUNA®)
13	6	screw	8.8 zinc plated steel A4~A316 (CF8M body / ASTM B148)
14	1	upper flange	zinc plated steel 1.4401~A316 (CF8M body ASTM B148)
◇15	1	O-ring	NBR (BUNA®)
◇16	1	O-ring	NBR (BUNA®)
17	4	screw	8.8 zinc plated steel A4~A316 (CF8M body/ ASTM B148)
18	1	key	steel
19	3	screw	A4~A316
◇20	3	O-ring	PTFE
21	3	washer	A4~A316
22	1	spring	1.4401 ~ A316 (antistatic device)

BVKA - Wafer **BLKA** - Lug
DN 40 - 800 • 1"1/2 - 32"

BVKX - Wafer
DN 50 - 250 • 2" - 10"

BLKX - Lug
DN 50 - 200 • 2" - 8"

Max working pressure:

BVKA/BLKA DN 40÷800: **20 Bar**
Flange: **A150**
BVKX DN 50÷250: **25 Bar**
Flange: **PN 25 • A150**
BLKX DN 50÷200: **25 Bar**
Flange: **PN 25**

To be used also with vacuum

Design:

EN 593 ~ EN 736 ~ EN 12516 ~ EN 1092
ISO 5211 ~ DIN 3337 ~ API 609
PED 2014/68/EU - Mod. H

Face to face:

DIN EN 558 Series 20 ~ ISO 5752 Series 20
BS-5155 Series 4 ~ MSS-SP67
API609 cat.A ~ NFE 29305-1

Testing:

EN 12266-1 Rate A (supersedes DIN 3230)
ISO 5208 Rate A ~ API 598

Tag:

EN 19 ~ MSS SP-25



SIL safety integrity level

EAC

CE 0497 [PED]

TÜV TA-Luft

Ex II 2GD Ex h X (see ATEX accompanying instructions)



All valves are supplied with a metallic label in compliance with PED directive.




BODY			BVKA/BLKA	BVKX	BLKX
material	references	standard coating	DN	DN	DN
Ductile iron	EN-GJS 400-15 (GS400)	Epoxy RAL 5009	40-800	50-250	50-200
Carbon steel	ASTM A216-WCB	Epoxy RAL 9005	40-800	50-100	50-100
Stainless steel	ASTM A351 CF8M (A316)	-	40-800	50-100	50-100
Aluminium-bronze	ASTM B148-C958.00	-	40-800	50-100	50-100

DISCO			BVKA/BLKA	BVKX	BLKX
material	references	standard coating	DN	DN	DN
Stainless steel	ASTM A351 CF8M (A316)	-	40-800	50-250	50-200
Aluminium-bronze	ASTM B148-C958.00	-	40-800	50-250	50-200
Hastelloy®	ASTM A494 CX2MW	-	40-800	50-250	50-200
Super Duplex	EN 1.4469 (A890 Gr. 5A)	-	40-800	50-250	50-200

BODY RUBBER SEAT		KA DN 40/150 replaceable - DN 200/800 vulcanized not replaceable KX DN 50/250 vulcanized not replaceable		
ref.	designation	trade name	working temp.	applications
NBR	nitrile rubber	BUNA®	-25°C / +100°C	oils, hydrocarbons, gas, air, water
EPDM	copolymer EPDM	-	-35°C / +130°C	water, sea water, steam, diluted acids
EPDM HT	copolymer EPDM HT	-	-40°C / +150°C	water, sea water, steam, diluted acids
FKM	fluoroelastomer	VITON®	-20°C / +200°C	oils, acids, hydrocabons

On request can be supplied other materials as: LCB, Hastelloy, Uranus, Alloy, Super Duplex, Special steels, Special bronzes.
Coating on request: RILSAN®, Halar®, Chenisil®


BVKA - Wafer **BLKA** - Lug
 DN 40 - 150 • 1"1/2 - 6"
 ANSI 150

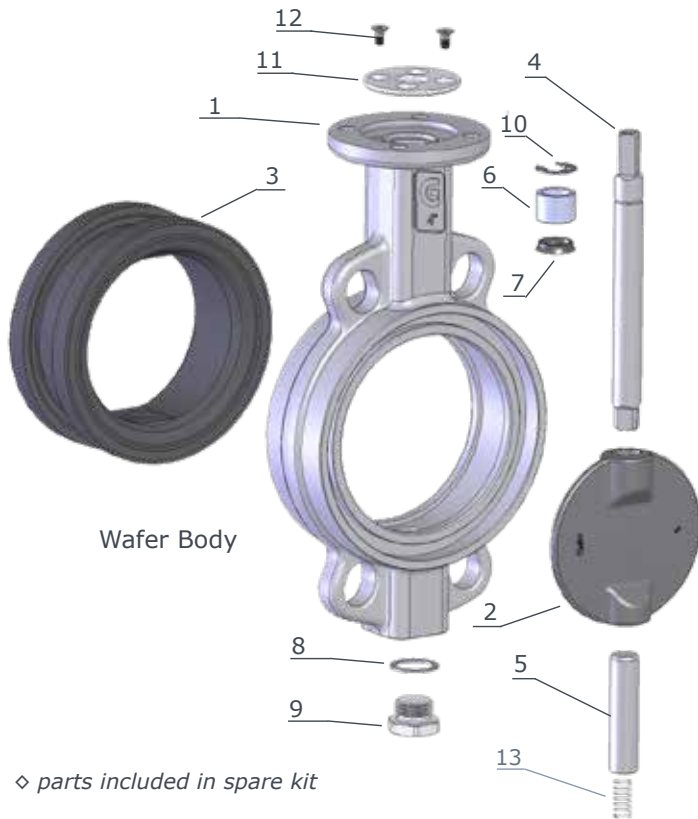

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB EN 1.4408~A351-CF8M
2	1	disc	EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
◇3	1	body seat (replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	upper shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
5	1	lower shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
◇6	1	bush	bronze
◇7	1	shaft packing	NBR (BUNA®) FKM (VITON®) (on request)
8	1	plug packing	aluminium PTFE (CF8M body / ASTM B148)
9	1	threaded plug	zinc plated steel 1.4401~A316 (CF8M body/ASTM B148)
10	1	stop ring	steel
11	1	upper flange	IXEF (DN 40-150) aluminium (DN 200-300)
12	2	screw	10.9 zinc plated steel A4~A316 (CF8M body/ ASTM B148)
13	1	spring	1.4401 ~ A316 (antistatic device)

◇ parts included in spare kit


BVKA - Wafer **BLKA** - Lug
 DN 200 - 300 • 8" - 12"
 ANSI 150

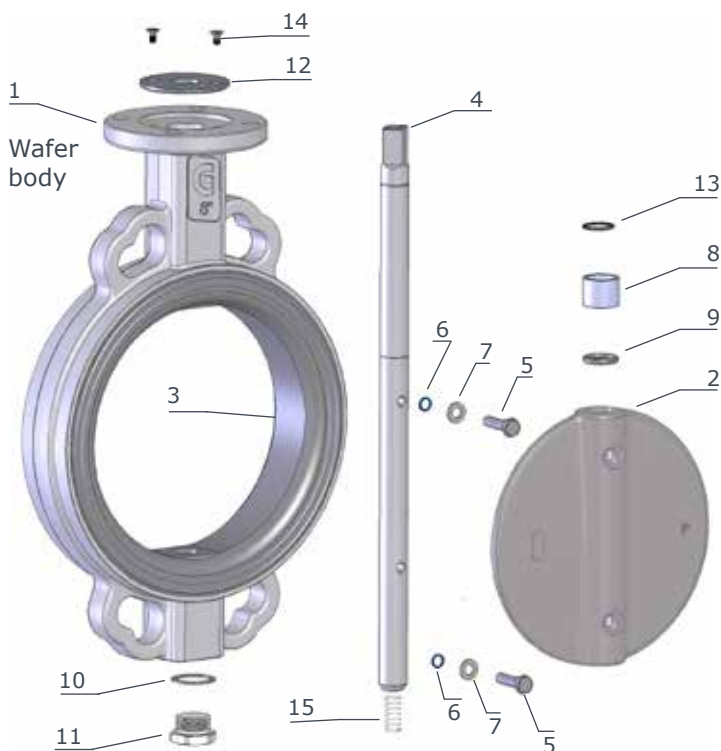

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB EN 1.4408~A351-CF8M EN1982-CC333G~ASTM B148 - C958.00
2	1	disc	EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
5	2	screw	10.9 zinc plated steel A4~A316 (CF8M body/ ASTM B148)
◇6	2	O.Ring	NBR (BUNA®)
7	2	washer	A4~A316
◇8	1	bush	bronze
◇9	1	shaft packing	NBR (BUNA®) FKM (VITON®) (on request)
10	1	plug packing	aluminium PTFE (CF8M body/ ASTM B148)
11	1	threaded plug	zinc plated steel 1.4401~A316 (CF8M body/ASTM B148)
12	1	upper flange	aluminium
13	1	stop ring	steel
14	2	screw	zinc plated steel
15	1	spring	1.4401 ~ A316 (antistatic device)

◇ parts included in spare kit

BVKA - Wafer **BLKA** - Lug
 DN 350 - 400 • 14" - 16"
 ANSI 150

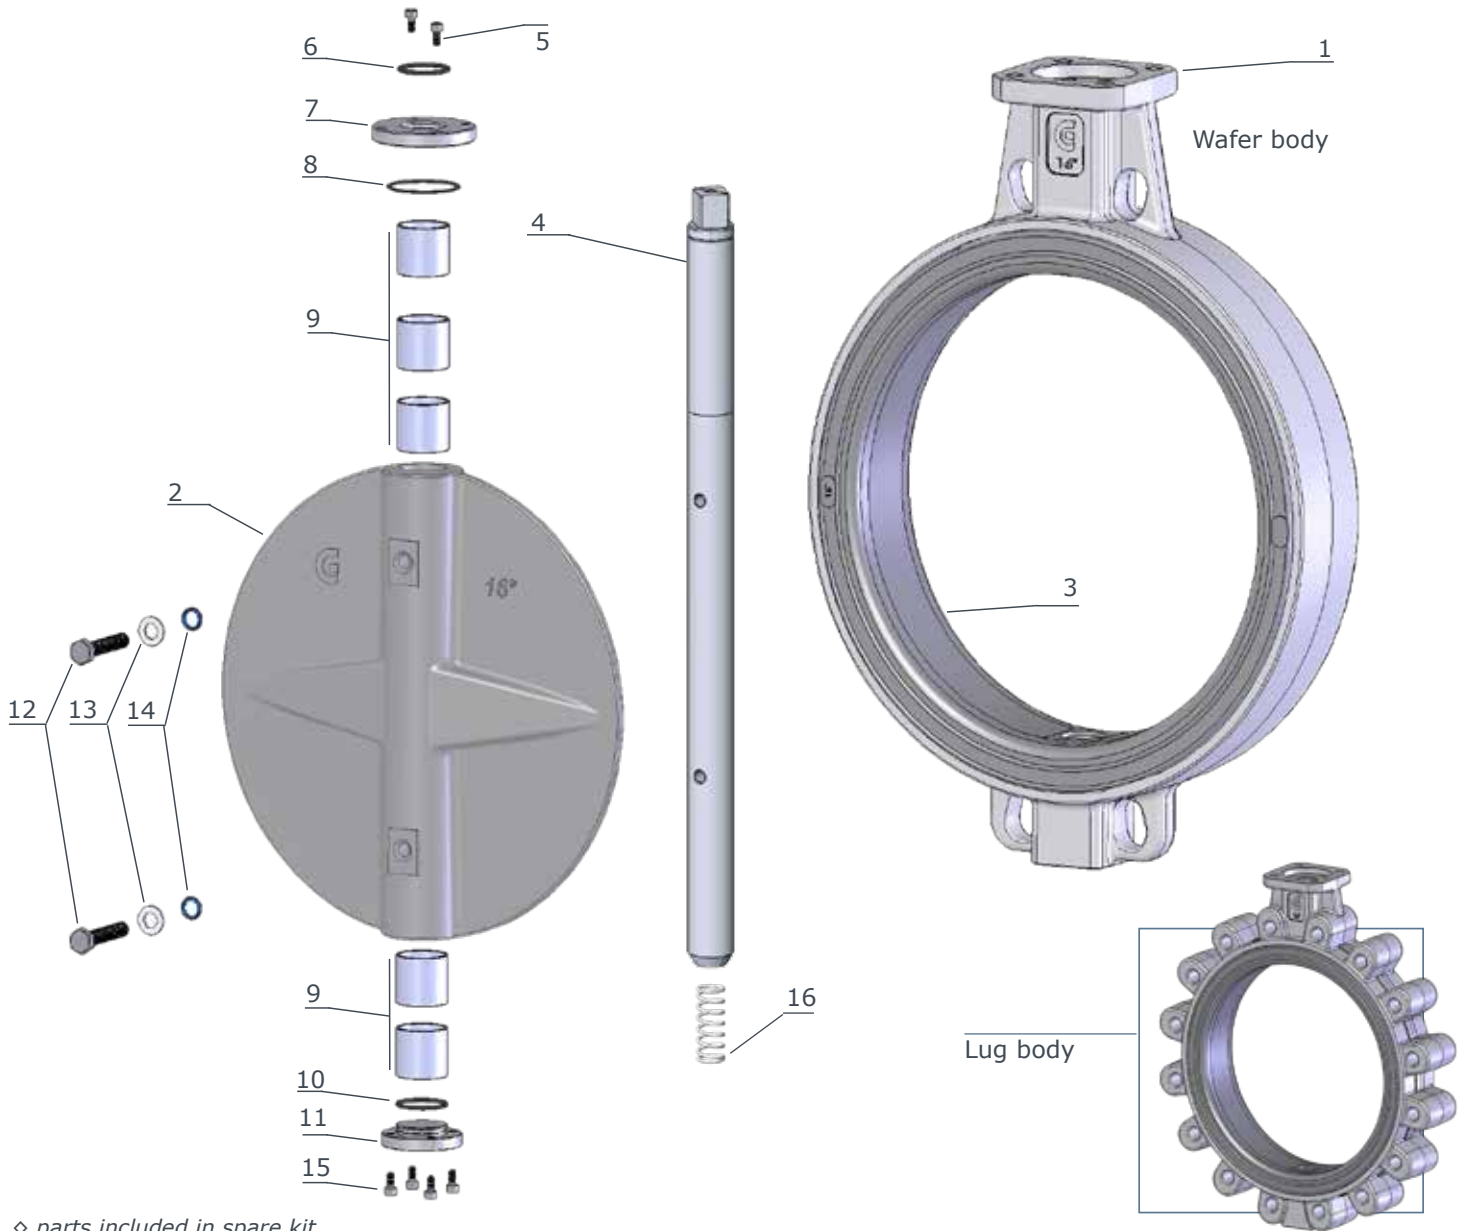


◇ parts included in spare kit

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB EN 1.4408~A351-CF8M EN1982-CC333G~ASTM B148 - C958.00
2	1	disc	EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)

item	q.ty	part	material
5	2	screw	10.9 zinc plated steel
◇6	1	O.ring	NBR (BUNA®)
7	1	upper flange	10.9 zinc plated steel
◇8	1	O.ring	NBR (BUNA®)
◇9	5	bush	bronze
◇10	1	O.ring	NBR (BUNA®)
11	1	lower flange	IXEF (DN 40-150) aluminium (DN 200-300) aluminio (DN 200-300)
12	2	screw	10.9 zinc plated steel
13	2	washer	A4~A316
◇14	2	O. ring	NBR (BUNA®)
15	4	screw	10.9 zinc plated steel
16	1	spring	1.4401 ~ A316 (antistatic device)

BVKA - Wafer **BLKA** - Lug
 DN 450 - 500 • 18" - 20"
 ANSI 150

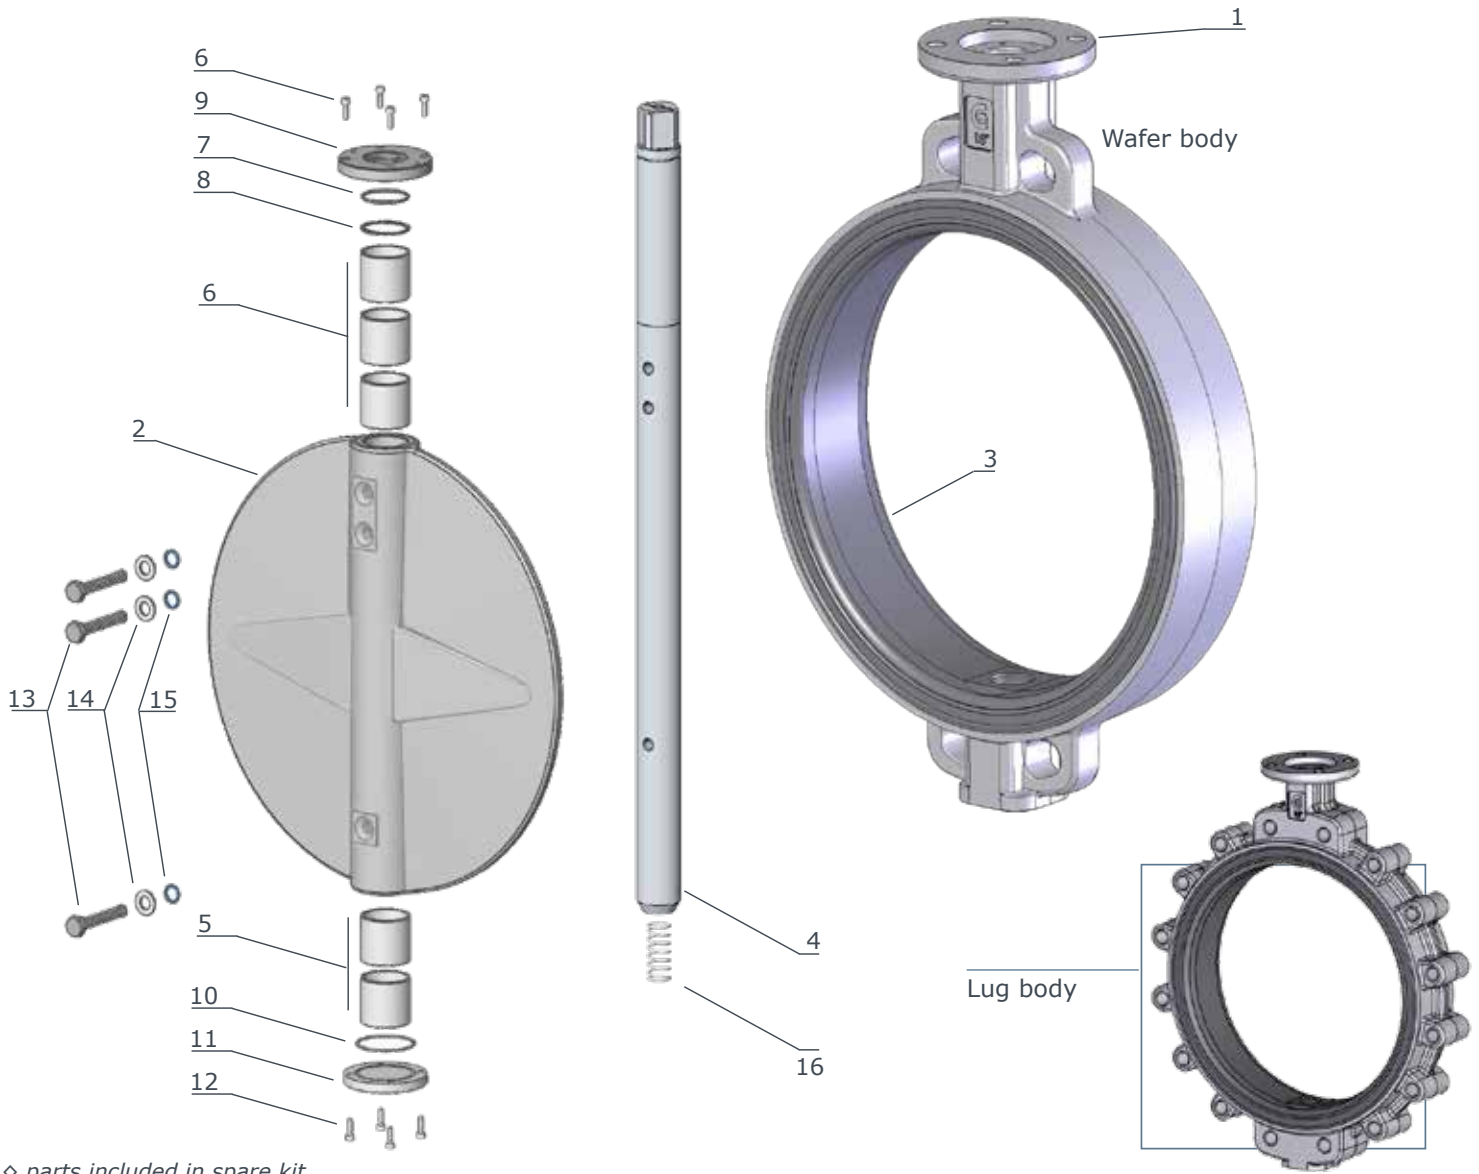


◇ parts included in spare kit

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB 1.4408~ A351-CF8M (A316) EN1982-CC333G~ASTM B148-C958.00
2	1	disc	EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148-C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
◇5	5	bush	steel + PTFE

item	q.ty	part	material
6	4	screw	8.8 zinc plated steel A4~A316 (CF8M body/ ASTM B148)
◇7	1	O.ring	NBR (BUNA®)
8	5	stop ring	steel
9	1	upper flange	zinc plated steel 1.4401~A316 (CF8M body/ASTM B148)
◇10	1	O.ring	NBR (BUNA®)
11	1	lower flange	zinc plated steel 1.4401~A316 (CF8M body/ASTM B148)
12	4	screw	8.8 zinc plated steel A4~A316 (CF8M body / ASTM B148)
13	2	screw	A4~A316
14	2	washer	A4~A316
◇15	2	O. ring	PTFE
16	1	spring	1.4401 ~ A316 (antistatic device)

BVKA - Wafer **BLKA** - Lug
DN 600 - 800 • 24" - 32"
ANSI 150

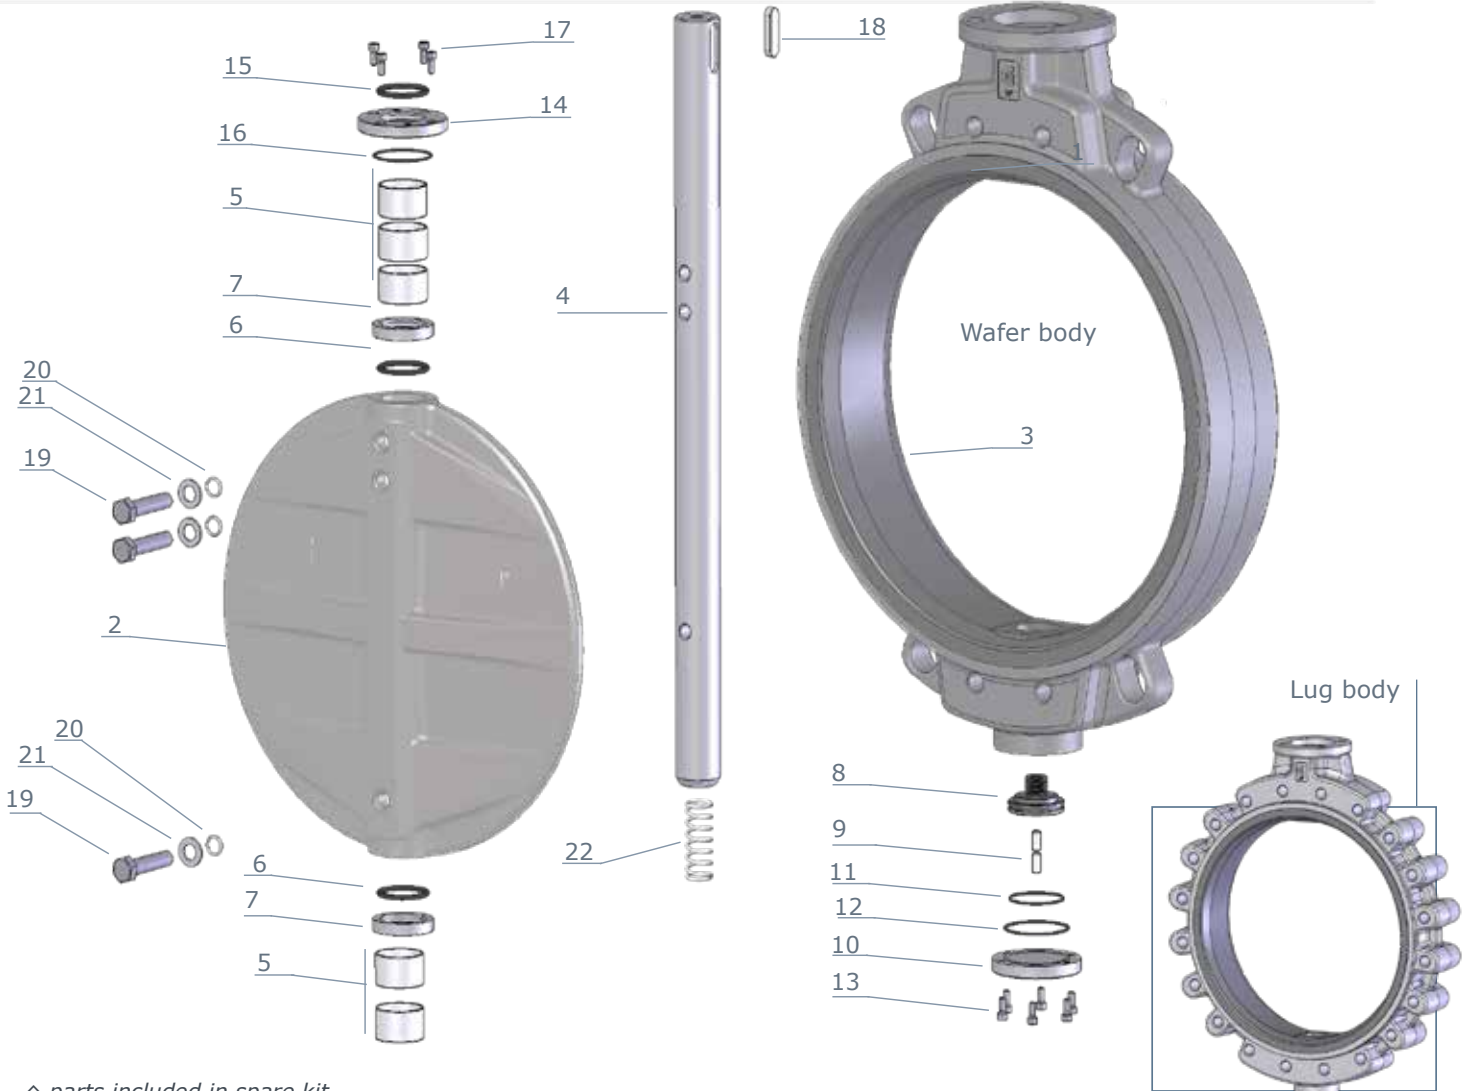


◇ parts included in spare kit

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~ A216-WCB 1.1156~A352-LCB EN 1.4408~A351-CF8M EN1982-CC333G~ASTM B148 - C958.00
2	1	disc	EN 1.4408~ A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	shaft	EN 1.4305~A303 EN 1.4401~A316 (on request)
◇5	5	bush	steel + PTFE
◇6	2	O-ring	NBR (BUNA®) FKM (VITON®) on request
7	2	O-ring housing	A4~A316

item	q.ty	part	material
8	1	shaft support	Bronze
9	2	adjusting screw	A4~A316
10	1	lower flange	zinc plated steel 1.4401~A316 (CF8M body / ASTM B148)
◇11	1	O.ring	NBR (BUNA®)
◇12	1	O.ring	NBR (BUNA®)
13	6	screw	8.8 zinc plated steel A4~A316 (CF8M body / ASTM B148)
14	1	upper flange	zinc plated steel 1.4401~A316 (CF8M body / ASTM B148)
◇15	1	O.ring	NBR (BUNA®)
◇16	1	O.ring	NBR (BUNA®)
17	4	screw	8.8 zinc plated steel A4~A316 (CF8M body / ASTM B148)
18	1	key	steel
19	3	screw	A4~A316
◇20	3	O.ring	PTFE
21	3	washer	A4~A316
22	1	spring	1.4401 ~ A316 (antistatic device)

BVKX - Wafer **BLKX** - Lug
DN 50 - 100 • 2" - 4"
PN 25

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400) EN 1.069~A216-WCB 1.1156~A352-LCB EN 1.4408~A351-CF8M
2	1	disc	EN 1.4408~A351-CF8M (A316) EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4-5	1	upper shaft	EN 1.4016~A430
	1	lower shaft	EN 1.4401~A316 (on request)
◇6	1	bush	bronze
◇7	1	shaft packing	NBR (BUNA®) FKM (VITON®) (on request)
8	1	plug packing	aluminium PTFE (corpo CF8M / ASTM B148)
9	1	threaded plug	zinc plated steel 1.4401~A316 (CF8M body/ASTM B148)
10	1	stop ring	steel
11	1	upper flange	IXEF (DN 40-150) aluminium (DN 200-300)
12	2	screw	zinc plated steel A4~A316 (CF8M body/ ASTM B148)
◇13	2	upper bush	A105+PTFE
◇14	2	lower bush	A105+PTFE
15	1	spring	1.4401 ~ A316 (antistatic device)

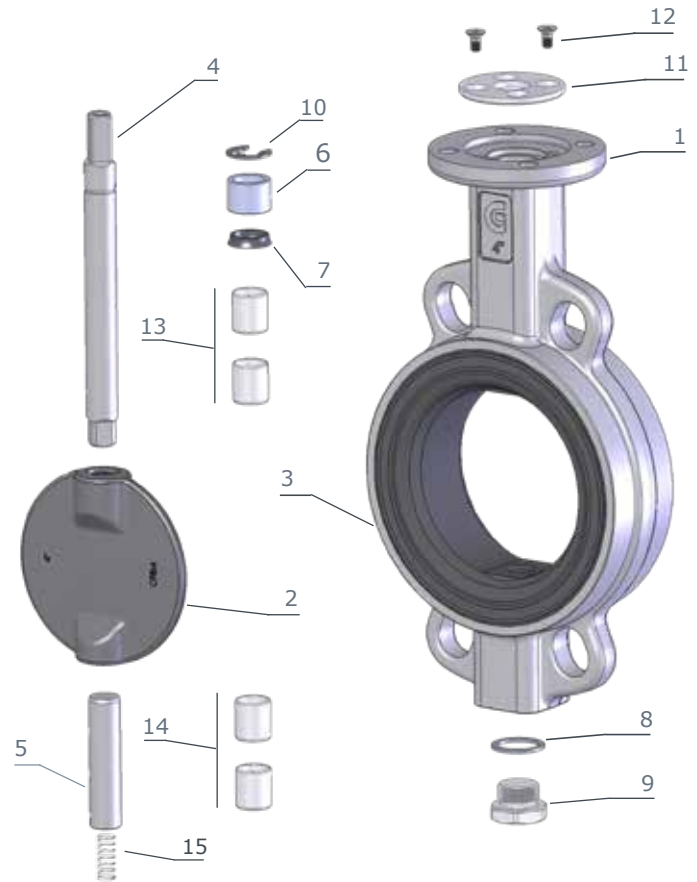


◇ parts included in spare kit

Wafer body

BVKX - Wafer
DN 125 - 250 • 5" - 10"
PN 25

BLKX - Lug
DN 125 - 200 • 5" - 8"
PN 25

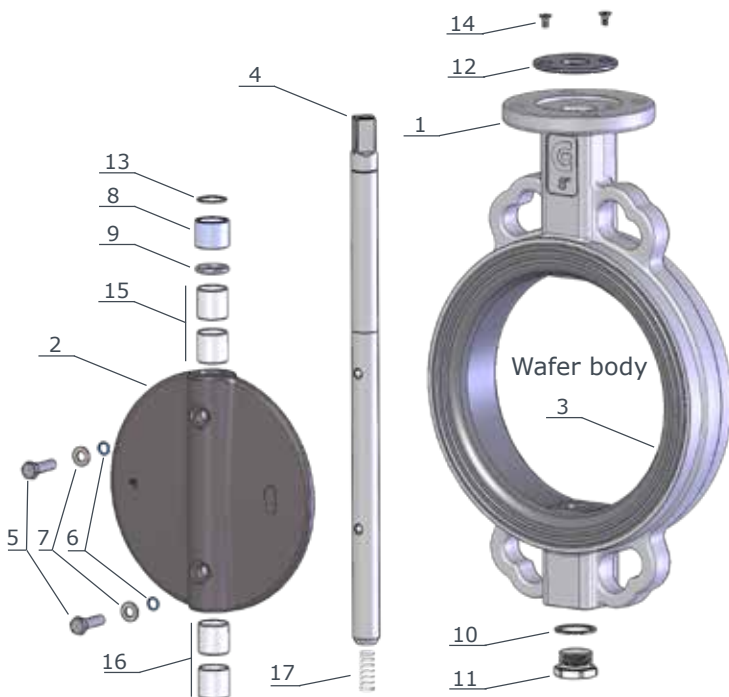




◇ parts included in spare kit

item	q.ty	part	material
1	1	body	EN-GJS400-15 (GS400)
2	1	disc	EN 1.4408~A351-CF8M EN1982-CC333G~ASTM B148 - C958.00 EN 2.4602~HASTELLOY-CX2MW EN 1.4469 (A890 Gr. 5A) SUPER DUPLEX
3	1	body seat (vulcanized not replaceable)	NBR (BUNA®) EPDM EPDM HT FKM (VITON®)
4	1	shaft	EN 1.4016~A430 EN 1.4401~A316 (on request)
5	2	screw	A4~A316
◇6	2	O.Ring	PTFE
7	2	washer	A4~A316
◇8	1	bush	bronze
◇9	1	shaft packing	NBR (BUNA®) FKM (VITON®) (on req.)
10	1	plug packing	aluminium PTFE (corpo CF8M / ASTM B148)
11	1	threaded plug	zinc plated steel 1.4401~A316 (CF8M body/ASTM B148)
12	1	upper flange	IXEF (DN 125-150) aluminium (DN 200-250)
13	1	stop ring	steel
14	2	screw	10.9 zinc plated steel A4~A316 (CF8M body/ ASTM B148))
◇15	2	upper bush	A105+PTFE
◇16	2	lower bush	A105+PTFE
17	1	spring	1.4401 ~ A316 (antistatic device)

BVPD - Wafer **BLPD** - Lug

BVKI - Wafer **BLKI** - Lug

BVKA - Wafer **BLKA** - Lug


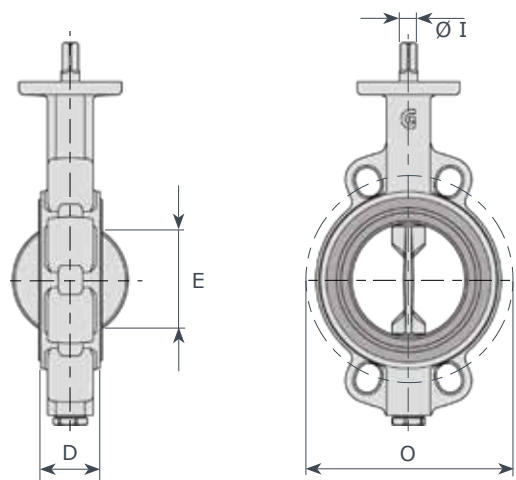
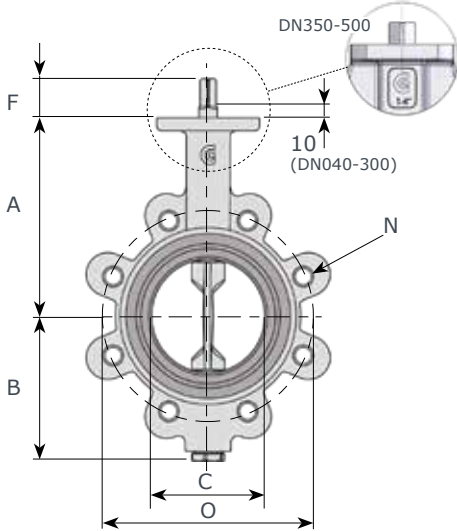


Upper flange - ISO 5211

DN 40 - 150	F07 - 4 holes
DN 200 - 300	F10 - 4 holes
DN 350 - 400	F12 - 4 holes
DN 450	F14 - 4 holes
DN 500	F14/16 - 4 holes

Note: in case of ANSI 150 flanges, threading can be 11/2"÷12" ANSI B1.1UNC2B

DN	A	B	C	D	E	F	Ø I	Ch	H	K	J	Kg															
												PN 6			PN 10			PN 16			ANSI 150			PD-KI		KA	
												N	n.	O	N	n.	O	N	n.	O	N	n.	O	W	L	W	L
40	130	75	49	33	36	34	14	11	90	70	9	-	-	-	M16	4	110	M16	4	110	M14	4	98.4	2.2	3	2.2	3
50	138	81	55	43	35	34	14	11	90	70	9	M12	4	110	M16	4	125	M16	4	125	M16	4	120.7	2.8	3.7	2.8	3.7
65	144	98	68	46	50	34	14	11	90	70	9	M12	4	130	M16	8	145	M16	8	145	M16	4	139.7	3.7	5.3	3.7	5.3
80	158	110	81	46	67	34	14	11	90	70	9	M16	4	150	M16	8	160	M16	8	160	M16	4	152.4	4	6.1	4	6.1
100	173	128	101	52	87	34	16	11	90	70	9	M16	4	170	M16	8	180	M16	8	180	M16	8	190.5	6	8.1	6	8.1
125	186	140	126	56	113	34	18	14	90	70	9	M16	8	200	M16	8	210	M16	8	210	M20	8	215.9	7.2	9.7	7.2	9.7
150	202	155	150	56	140	34	18	14	90	70	9	M16	8	225	M20	8	240	M20	8	240	M20	8	241.3	9.1	11.5	9.5	11.8
200	240	190	200	60	191	38	22	17	125	102	11	M16	8	280	M20	8	295	M20	12	295	M20	8	298.5	14	27	16	29
250	270	220	250	68	241	38	30	22	125	102	11	M16	12	335	M20	12	350	M24	12	355	M22	12	362.0	22	34	26	38
300	300	247	298	78	289	38	30	22	125	102	11	M20	12	395	M20	12	400	M24	12	410	M22	12	431.8	32	49	36	53
350	330	280	341	78	332	28	35	27	150	125	14	M20	12	445	M20	16	460	M24	16	470	M24	12	476.3	42	62	55	75
400	355	305	390	102	376	28	40	27	150	125	14	M20	16	495	M24	16	515	M27	16	525	M27	16	539.8	76	90	94	104
450	400	343	444	114	430	37	45	36	175	140	18	M20	16	550	M24	20	565	M27	20	585	M27	16	577.8	110	170	135	195
500	422	366	495	127	479	37	45	36	210	140/165	18/22	M20	20	600	M24	20	620	M30	20	650	M27	20	635.0	140	180	165	205

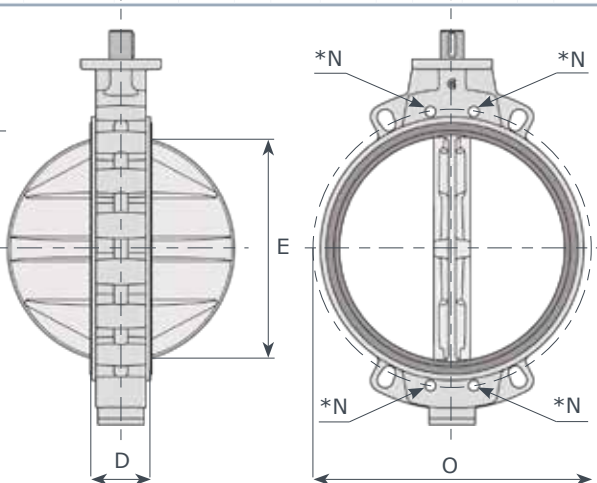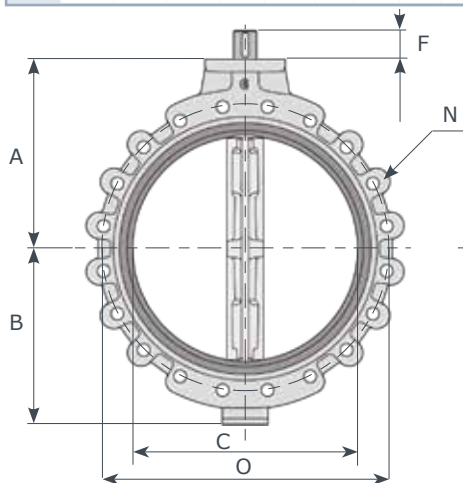

Upper flange - ISO 5211


DN 600	F16 - 4 holes
DN 700 - 800	F25 - 8 holes

Note: in case of ANSI150 flanges, threading can be:
14" ANSI B1.1UNC2B
16"÷32" ANSI B1.1-8 UNC2B

*Note: WAFER bodies DN 600 - 700 - 800 have 4 holes N threaded as relevant LUG version

DN	A	B	C	D	E	F	Ø I	Ch	H	K	J	Kg															
												PN 6			PN 10			PN 16			ANSI 150			PD-KI		KA	
												N	n.	O	N	n.	O	N	n.	O	N	n.	O	W	L	W	L
600	495	460	595	154	575	75	60	18	210	165	22	M24	20	705	M27	20	725	M33	20	770	M33	20	749.3	220	290	220	290
700	550	506	690	165	670	90	70	20	300	254	18	M24	24	810	M27	24	840	M33	24	840	M33	28	863.6	300	415	300	415
800	640	590	780	190	757	100	80	22	300	254	18	M27	24	920	M30	24	950	M36	24	950	M39	28	977.9	444	570	465	570

BVKX - Wafer **BLKX** - Lug

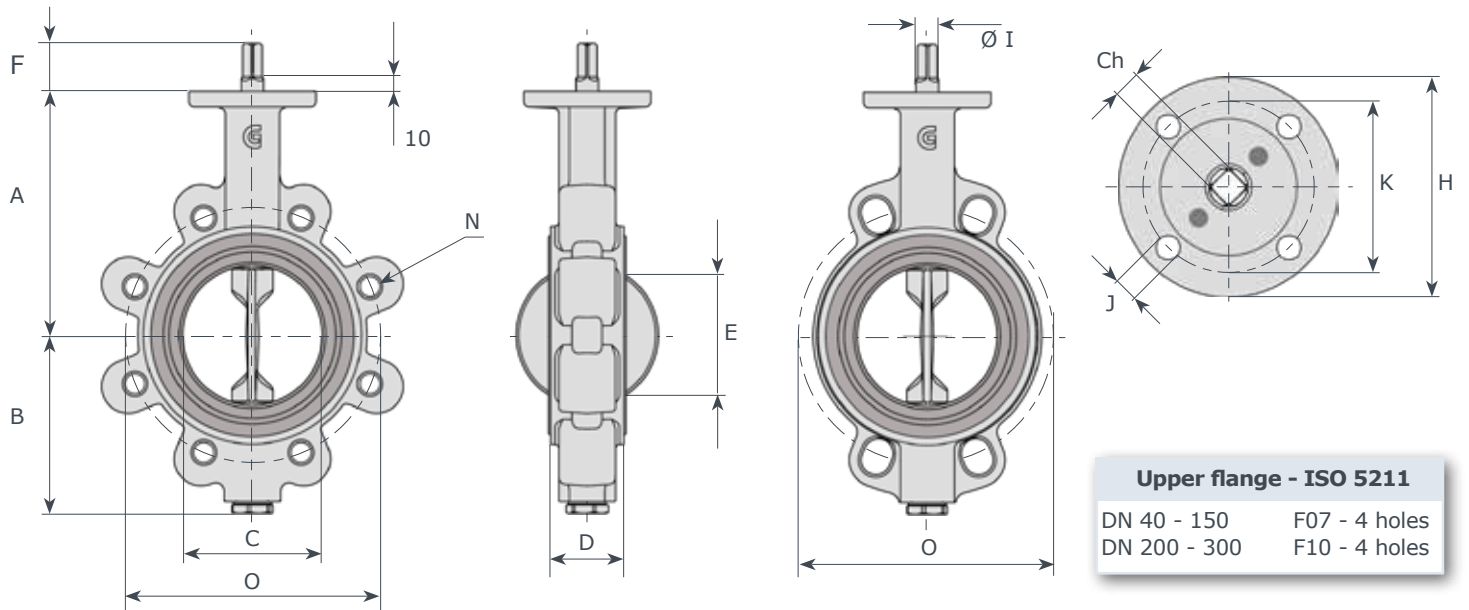

DN	"	A	B	C	D	E	F	Ø I	Ch	H	K	J	PN 25			Kg.	
													N	n.	O	wafer	lug
50	2	138	81	55	43	35	34	14	11	90	70	9	M16	4	125	2.8	3.7
65	2½	144	98	68	46	50	34	14	11	90	70	9	M16	8	145	3.7	5.3
80	3	158	110	81	46	67	34	14	11	90	70	9	M16	8	160	4	6.1
100	4	173	128	101	52	87	34	16	11	90	70	9	M20	8	190	6	8.1
125	5	186	140	126	56	113	34	18	14	90	70	9	M24	8	220	7.2	9.7
150	6	202	155	150	56	140	34	18	14	90	70	9	M24	8	250	9.5	11.8
200	8	240	190	200	60	191	38	22	17	125	102	11	M24	12	310	16	29
250	10	270	220	250	68	241	38	30	22	125	102	11	--	--	370	25	--



PD Series - Torque values - Nm - safety factor excluded

Seat body NBR/EPDM				fluid H ₂ O - 20°C							
working pressure BAR				working pressure BAR							
DN	0	6	10	DN	0	6	10	DN	0	6	10
80	5	7	11	250	89	100	115	500	410	430	460
100	8	12	24	300	167	180	280	600	1330	1577	-
125	22	31	40	350	245	340	395	700	1409	1904	-
150	40	45	49	400	382	405	420	800	2890	3400	-
200	47	58	90	450	395	418	445	-	-	-	-

Seat body FKM/natural rubber				fluid H ₂ O - 20°C							
working pressure BAR				working pressure BAR							
DN	0	6		DN	0	6		DN	0	6	
80	7	11		250	120	134		500	607	675	
100	11	16		300	225	241		600	1795	2130	
125	29	42		350	465	495		700	2310	3300	
150	52	65		400	515	540		800	3376	3960	
200	62	78		450	578	627		-	-	-	

KI Series - Torque values - Nm - safety factor excluded

Seat body NBR/EPDM				fluid H ₂ O - 20°C											
working pressure BAR				working pressure BAR				working pressure BAR				working pressure BAR			
DN	0	6	10	16	DN	0	6	10	16	DN	0	6	10	16	
40	11	11	13	14	150	55	60	84	90	450	480	520	720	1050	
50	11	12	13	15	200	100	107	180	210	500	550	600	810	1600	
65	11	16	16	18	250	160	175	220	320	600	1650	1960	2300	-	
80	20	30	36	40	300	260	270	320	390	700	2270	3000	3350	-	
100	40	43	45	48	350	410	450	590	850	800	3200	3400	4000	-	
125	48	52	52	70	400	450	480	650	900						


Seat body FKM/natural rubber				fluid H ₂ O - 20°C											
working pressure BAR				working pressure BAR				working pressure BAR				working pressure BAR			
DN	0	6	10	16	DN	0	6	10	16	DN	0	6	10	16	
40	14	14	16	17	150	66	72	101	108	450	580	630	880	1310	
50	14	15	16	18	200	120	129	216	252	500	660	740	990	2020	
65	14	20	20	22	250	192	210	264	386	600	1980	2380	2760	-	
80	24	36	44	48	300	312	330	396	480	700	2750	3680	4040	-	
100	48	52	54	58	350	498	545	728	1050	800	3880	4120	4860	-	
125	60	62	64	84	400	550	584	798	1120						

KA/KX Series - Torque values - Nm - safety factor excluded

Seat body NBR/EPDM				fluid H ₂ O - 20°C											
working pressure BAR				working pressure BAR								working pressure BAR			
DN	0	6	10	16	20	25	DN	0	6	10	16	20			
40	12	12	14	15	15	-	300	272	294	362	410	429			
50	12	13	14	16	17	20	350	431	557	714	1071	1122			
65	12	17	17	19	20	31	400	683	767	893	1470	1540			
80	21	32	38	42	44	49	450	1000	1208	1313	1995	2090			
100	42	45	47	50	53	65	500	1155	1418	1733	2625	2750			
125	50	55	55	74	77	82	600	2300	2800	3700	4800	5280			
150	58	63	88	95	99	103	700	3800	5050	5600	6900	7590			
200	105	112	189	221	231	320	800	5200	6800	7900	10300	11330			
250	175	190	231	336	352	440									

Head losses

NOTES: values indicated in this page is only for information

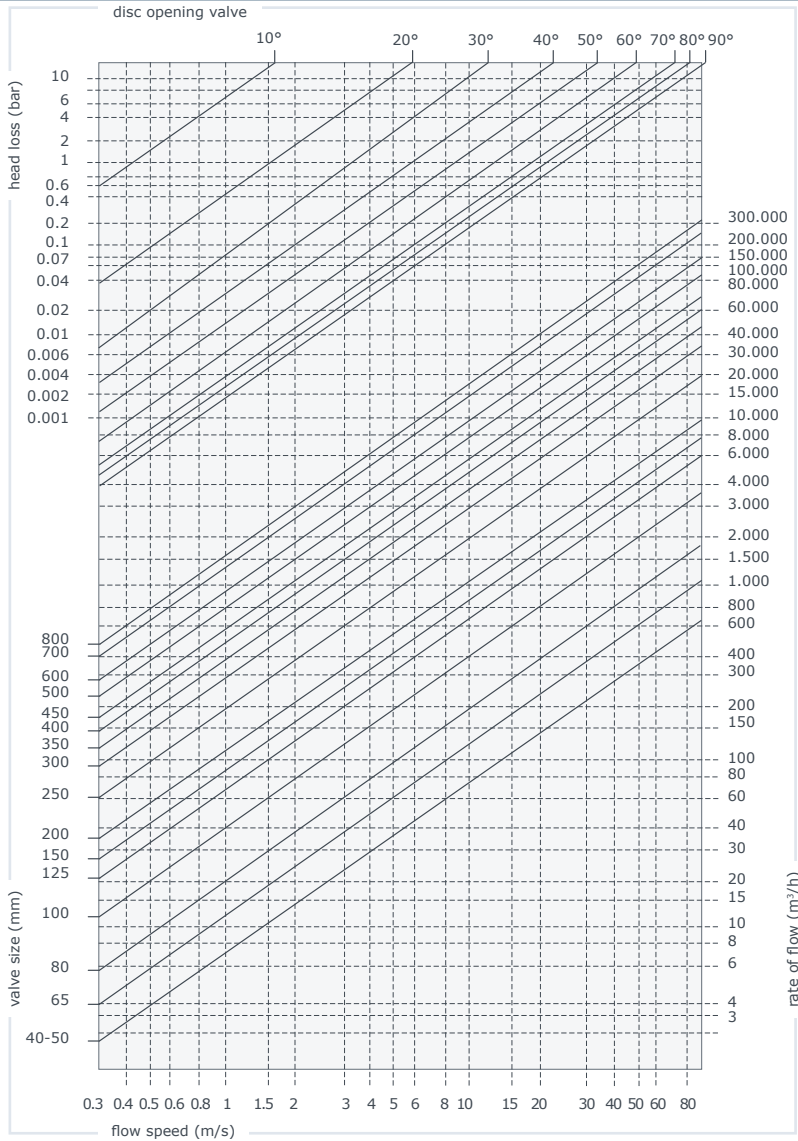

Formulae for calculation of rate flow

Liquids:
$$Q = \frac{KV}{\sqrt{\frac{PS}{\Delta P}}}$$

Q rate of flow (m³/h)
PS specific gravity (water=1)
ΔP pressure drop (bar)

Gas:
$$Q = 28.5 \frac{KV}{\sqrt{\frac{PS}{P_2 \cdot \Delta P}}}$$

Q rate of flow (m³/h)
PS specific gravity (air=1)
ΔP pressure drop (bar) (less than 1/2 inlet pressure)
P₂ outlet pressure

Steam:
$$Q = 22.5 \cdot KV \cdot \sqrt{P_2 \cdot \Delta P}$$

Q rate of flow (Kg/h)
ΔP pressure drop (bar) (less than 1/2 inlet pressure)
P₂ outlet pressure

Calculation of the rate of flow equivalent to H2O

$$Q_e = Q \sqrt{\frac{d}{1000}}$$


For different liquid, gas or steam head losses are determined by equivalent water of flow, as follows:

Q_e equivalent water flow (mc/l o l/s)
Q fluid flow (mc/l o l/s)
d fluid specific gravity (Kg/mc)

Values KV (CV = 1,16 KV)

angle	40/50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800
5°	-	-	-	-	-	-	-	-	-	53	68	85	106	151	206	270
10°	-	-	-	-	-	-	-	21	49	123	161	199	246	354	482	629
15°	0,2	0,6	1,8	2,4	4,2	5,6	14	80	188	228	299	369	457	658	900	1168
20°	0,9	2,5	5,2	9,5	15	23	110	156	280	315	412	511	630	907	1234	2010
25°	3	6,1	12	22	38	61	125	225	354	457	597	740	914	1314	1789	2735
30°	6,1	11	21	39	69	112	211	310	381	661	863	1069	1320	1899	2585	5080
35°	9,9	18	33	60	105	166	303	433	521	890	1162	1440	1778	2560	3484	6254
40°	15	27	49	88	148	228	405	591	742	1184	1547	1916	2366	3407	4638	9700
45°	21	38	68	121	199	303	528	774	987	1552	2028	2512	3102	4466	6079	11581
50°	29	51	91	159	262	394	679	988	1252	2008	2620	3248	4010	5774	7860	15000
55°	39	68	119	207	338	505	863	1247	1571	2548	3318	4123	5090	7329	9976	17765
60°	53	90	156	269	434	641	1085	1591	2059	3225	4202	5218	6442	9277	12627	22200
65°	72	121	209	357	565	820	1364	2065	2807	3983	5196	6445	7957	11457	15595	26077
70°	92	161	283	487	768	1097	1788	2715	3744	5195	6775	8412	10377	14944	20341	34500
75°	109	209	381	662	1059	1507	2425	3625	4935	6964	9084	11269	13912	20032	27267	39546
80°	115	240	457	815	1303	1861	3043	4768	6831	9301	12142	15048	18578	26752	36413	47560
85°	115	253	502	906	1457	2008	3642	4890	8230	10280	13408	16632	20533	29568	40246	52566
90°	116	257	508	925	1492	2168	3838	5010	9233	10792	14082	17840	22024	31715	43166	56381

Flanges to be used

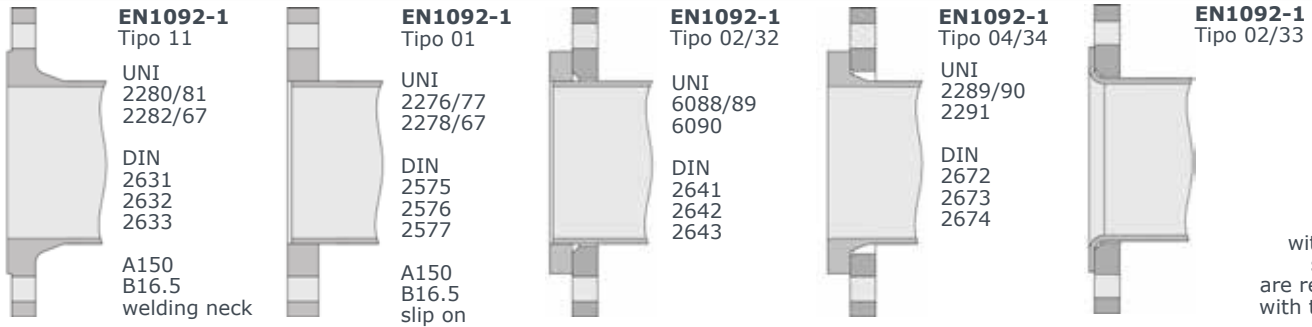

NOTE
only valves with vulcanized seat (KA/KX) are recommended with these flanges

Compatibility flanges - body Wafer

DN	EN 1092-1 / EN 1092-2					ASME/ANSI			BS 10		JIS B2220		
	PN 6	PN 10	PN 16	PN 25	PN 40	class 125	class 150	class 300	tab D	tab E	5K	10K	16K
40	☐	✓	✓	✓	✓	✓	✓	●	✓	✓	✓	✓	✓
50	☐	✓	✓	✓	✓	✓	✓	✗	●	●	●	☐	✗
65	☐	✓	✓	✓	✓	✓	✓	●	●	●	✓	✓	☐
80	☐	✓	✓	✓	✓	✓	✓	●	●	●	●	●	✓
100	☐	✓	✓	●	●	✓	✓	✗	●	✓	✗	●	✓
125	☐	✓	✓	●(1)	●(1)	✓	✓	✗	✓	✓	☐	✓	●(1)
150	☐	✓	✓	●(1)	●(1)	✓	✓	✗	●	●	☐	✓	✗
200	☐	✓	✓	✓(2)	✗	✓	✓	✗	✓	✓	●	●	✓(2)
250	☐	✓	✓	●	✗	✓	✓	✗	✗	✓	●	✓	✗
300	☐	✓	✓	✓(2)	✗	✓	✓	✗	✓	✓	●	●	✓(2)
350	☐	✓	✓	●	✗	✓	✓	✗	✓	✓	●	●	●
400	☐	✓	✓	●	✗	✓	✓	✗	✗	✗	●	●	✓
450	☐	✓	✓	●	✗	✓	✓	✗	✗	●	●	✓	✗
500	☐	✓	✓	●	✗	✓	✓	✗	✗	✗	●	✓	✓
600	☐	✓	✓	●	✗	✓	✓	✗	✗	✗	●	✗	✗
700	☐	✓	✓	✗	✗		✓	✗			●	✓	✗
800	☐	✓	✓	✗	✗		✓	✗			●	✓	✗

✓ standard on request ☐ only body PN 6 version not possible ● on request ✗ not possible
 (1) only with ductile iron bodies
 (2) standard with ductile iron and steel bodies, on request with different materials

Compatibility flanges - body Lug

DN	EN 1092-1 / EN 1092-2					ASME/ANSI			BS 10		JIS B2220		
	PN 6	PN 10	PN 16	PN 25	PN 40	class 125	class 150	class 300	tab D	tab E	5K	10K	16K
40	☐	✓	✓	✓	✓	✓	✓	●	☐	☐	●	●	●
50	☐	✓	✓	✓	✓	✓	✓	✗	●	●	●	●	✗
65	☐	✓	✓	✓	✓	✓	✓	●	●	●	●	●	✓
80	☐	✓	✓	✓	✓	✓	✓	●	●	●	●	●	●
100	☐	✓	✓	●	●	✓	✓	✗	●	✓	✗	●	●
125	☐	✓	✓	●(1)	●(1)	✓	✓	✗	✓	✓(PN6)	✓	●	●(1)
150	☐	✓	✓	●(1)	●(1)	✓	✓	✗	●	●	●	✓	✗
200	☐	✓	✓	●	✗	✓	✓	✗	●	●	●	●	✗
250	☐	✓	✓	✗	✗	✓	✓	✗	✗	●	●	●	✗
300	☐	✓	✓	✗	✗	✓	✓	✗	●	●	●	✓(1)	✗
350	☐	✓	✓	✗	✗	✓	✓	✗	●	●	●	●	✗
400	☐	✓	✓	✗	✗	✓	✓	✗	✗	✗	●	●	●
450	☐	✓	✓	✗	✗	✓	✓	✗	✗	●	●	✓	✗
500	☐	✓	✓	✗	✗	✓	✓	✗	✗	✗	●	✓	✗
600	☐	✓	✓	●	✗	✓	✓	✗	✗	✗	●	✗	✗
700	☐	✓	✓	✗	✗		✓	✗			●	✓	✗
800	☐	✓	✓	✗	✗		✓	✗			●	✓	✗

✓ standard on request ☐ only body PN 6 version not possible ● on request ✗ not possible
 (1) only with ductile iron bodies
 (2) standard with ductile iron and steel bodies, on request with different materials


Bolts and rods dimensions

DN	Wafer valves											
	PN 6			PN 10			PN 16			ANSI 150		
	Bolts	Rods	N°	Bolts	Rods	N°	Bolts	Rods	N°	Bolts	Rods	N°
40	M12x80	M12x90	4	M16x90	M16x100	4	M16x90	M16x100	4	M14x90	M14x110	4
50	M12x90	M12x100	4	M16x100	M16x120	4	M16x100	M16x120	4	M16x100	M16x130	4
65	M12x100	M12x110	4	M16x110	M16x130	8	M16x110	M16x130	8	M16x110	M16x140	4
80	M16x100	M16x120	4	M16x110	M16x130	8	M16x110	M16x130	8	M16x120	M16x150	4
100	M16x110	M16x120	4	M16x120	M16x140	8	M16x120	M16x140	8	M16x120	M16x150	8
125	M16x120	M16x140	8	M16x120	M16x150	8	M16x120	M16x150	8	M20x130	M20x160	8
150	M16x120	M16x140	8	M20x130	M20x160	8	M20x130	M20x160	8	M20x140	M20x160	8
200	M16x130	M16x150	8	M20x140	M20x170	8	M20x140	M20x170	12	M20x150	M20x170	8
250	M16x140	M16x160	12	M20x150	M20x180	12	M24x150	M24x180	12	M22x160	M22x190	12
300	M20x150	M20x180	12	M20x160	M20x190	12	M24x160	M24x190	12	M22x170	M22x210	12
350	M20x150	M20x180	12	M20x160	M20x190	16	M24x170	M24x200	16	M24x180	M24x220	12
400	M20x180	M20x210	16	M24x190	M24x220	16	M27x210	M27x240	16	M27x210	M27x250	16
450	M20x190	M20x220	16	M24x200	M24x230	20	M27x220	M27x250	20	M27x230	M27x270	16
500	M20x210	M20x240	20	M24x210	M24x240	20	M30x240	M30x280	20	M27x250	M27x290	20
600	M24x240	M24x270	20	M27x250	M27x290	20	M33x270	M33x320	20	M33x290	M33x340	20
700	M24x250	M24x280	24	M27x260	M27x310	24	M33x280	M33x330	24	M33x350	M33x400	28
800	M27x280	M27x320	24	M30x290	M30x350	24	M36x320	M36x360	24	M39x400	M33x460	28

DN	Lug valves							
	PN 6		PN 10		PN 16		ANSI 150	
	Bolts	N°	Bolts	N°	Bolts	N°	Bolts	N°
40	M12x30	8	M16x30	8	M16x30	8	M14x30	8
50	M12x35	8	M16x35	8	M16x35	8	M16x35	8
65	M12x35	8	M16x40	16	M16x40	16	M16x40	8
80	M16x40	8	M16x40	16	M16x40	16	M16x40	8
100	M16x40	8	M16x40	16	M16x40	16	M16x45	16
125	M16x45	16	M16x45	16	M16x45	16	M20x50	16
150	M16x45	16	M20x45	16	M20x45	16	M20x50	16
200	M16x50	16	M20x50	16	M20x50	24	M20x55	16
250	M16x55	24	M20x55	24	M24x55	24	M22x60	24
300	M20x60	24	M20x60	24	M24x60	24	M22x60	24
350	M20x60	24	M20x60	32	M24x65	32	M24x65	24
400	M20x70	32	M24x70	32	M27x70	32	M27x80	32
450	M20x80	32	M24x80	40	M27x80	40	M27x80	32
500	M20x80	40	M24x80	40	M30x80	40	M27x90	40
600	M24x90	40	M27x90	40	M33x100	40	M33x100	40
700	M24x100	48	M27x100	48	M33x110	48	M33x130	56
800	M27x110	48	M30x120	48	M36x130	48	M39x150	56

NOTE 1 Screw and rod dimensions have been calculated with WELDING NECK flanges PN 6/10/16 (EN1092-1 Type 11) ANSI150 (ANSI B16.5)


NOTE 2 Number of nuts should be double when WAFER valves are assembled with threaded rods.

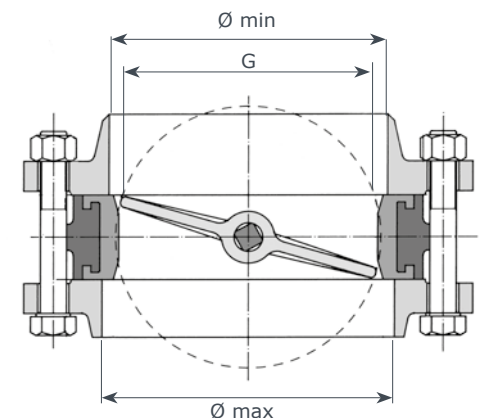


DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	800
G	36	35	50	67	87	113	140	191	241	289	332	376	430	475	575	670	757
Ø min	46	44	60	75	98	122	148	196	244	296	342	378	440	485	585	681	782
Ø max	49	62	80	93	118	146	175	225	275	330	372	422	450	500	600	717	815

Installation


Assembly




1 - Leave a space between flanges so that valve can be easily inserted and removed.



2 - Open completely the valve before tightening flanges.



3 - Tighten bolts till flanges are in contact with valve body.

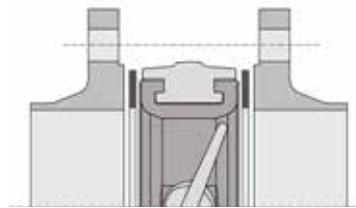


4 - NOTE: do not insert other packing between flange and valve.

NOTE: Weld the pipe only in spots with the valve between flanges. Remove the valve before finishing welding to avoid that heat damage the seat. Clean carefully the welding to avoid that slags damage the seat.


Installation for powders and muddy fluids

In case of use with powders or muddy fluids, install the valve with horizontal rotation axis, to allow sediments to flow easily on opening.

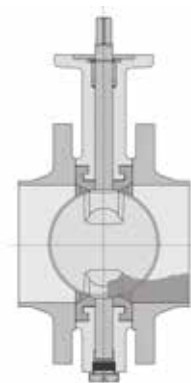

Wrong
Vertical rotation axis

←
powders or muddy fluids




Right
Horizontal rotation axis

←
powders or muddy fluids


This type of installation is always advisable with valve diameters over DN 400.

End piping installation

When valves are installed end of piping, a counterflange as per dwg type B is needed to secure tightness at max pressure.

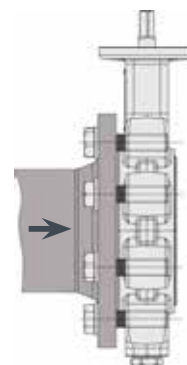


Type A installation without counterflange

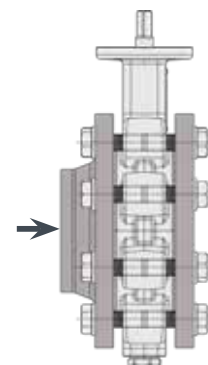


Type B installation with counterflange

valve type	P _{max} (Bar)	
	type A inst.	type B inst.
BLPD	4	6
BLKI	6	16
BLKA	16	20
BLKX	16	25


Handlevers

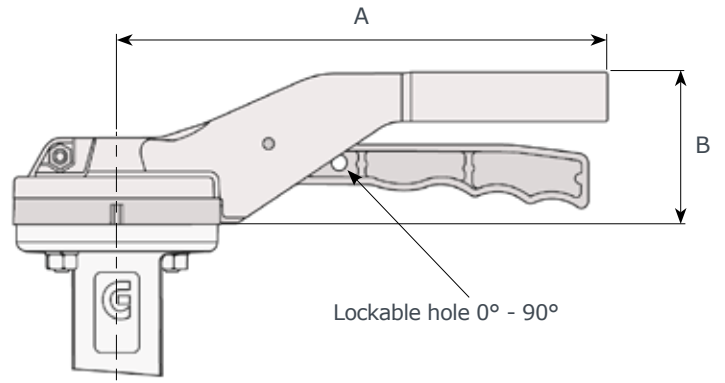


DN	A	B	D	Kg	
				aluminium	st. steel
40 - 100	220	67	93	0.60	1.80
125 - 150	275	67	93	0.65	2.05
200 - 300	340	76	125	1	--

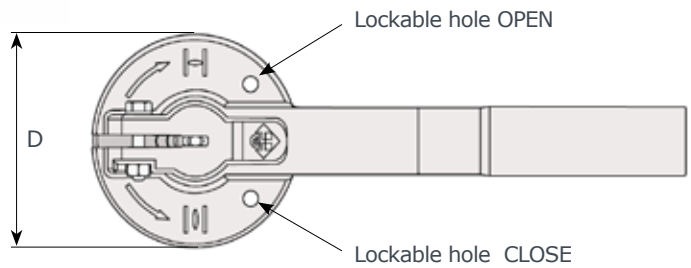

Note: DN 250 - 300 handlever not recommended (PD series excluded)

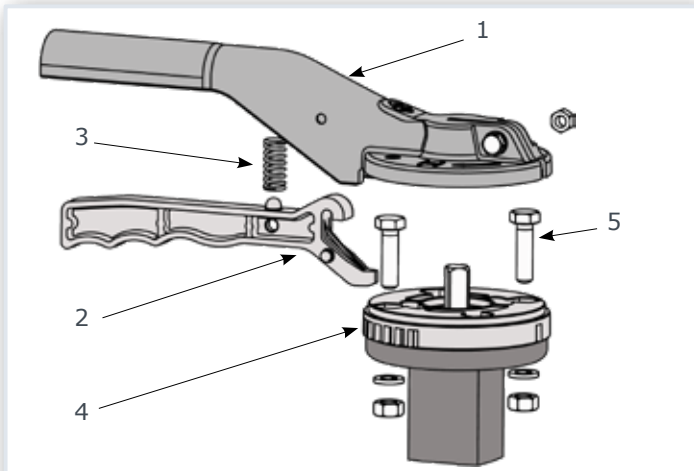


OPTIONALS

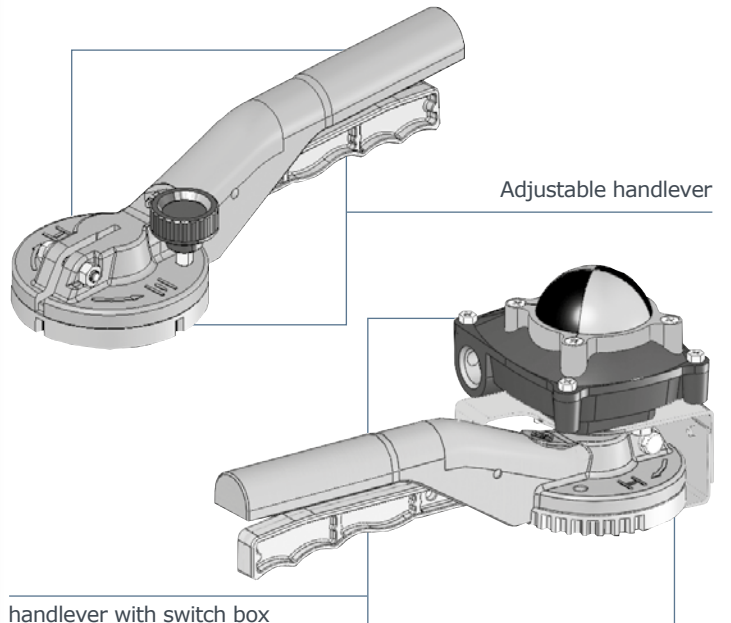

handlever with switch box (only DN 40/300)

handlever with 2 SPDT or inductive limit switches

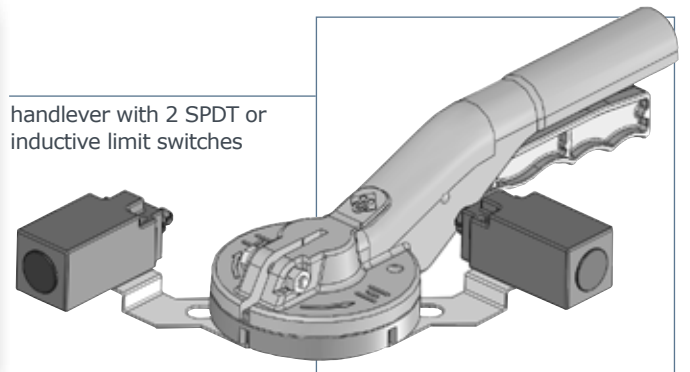

	DN40 - 300	DN40 - 150
1	lever aluminium	A351 CF8M
2	trigger aluminium	A351 CF8M
3	spring stainless steel	stainless steel
4	disc positioning aluminium	A351 CF8M
5	screws stainless steel	stainless steel

positioning disc DN 40 - 150 designed for flanges ISO 5211 F05/F07



10 positions



Open - Closed


positioning disc with two types of regulation: 10 positions or Open/Close

Gearboxes Aluminium body - HW Series

Coupling valve - actuators

DN	"	PD	KI			KA	KX
			p = 6 bar	p = 10 bar	p = 16 bar		
40	1 ^{1/2}	--	HW070	HW070	HW070	--	--
50	2	--	HW070	HW070	HW070	HW070	HW070
65	2 ^{1/2}	--	HW070	HW070	HW070	HW070	HW070
80	3	HW070	HW070	HW070	HW070	HW070	HW070
100	4	HW070	HW070	HW070	HW070	HW070	HW070
125	5	HW070	HW070	HW070	HW070	HW070	HW070
150	6	HW070	HW070	HW070	HW070	HW070	HW070
200	8	HW102	HW102	HW102	HW102	HW102	HW102
250	10	HW102	HW102	HW102	HW102	HW102	HW102
300	12	HW102	HW102	HW102	HW102	HW102	--
350	14	HW140	HW140	HW140	HW140	HW140	--
400	16	HW140	HW140	HW140	HW140	--	--

HW series	
body:	aluminium
worm gears:	steel
sector gear:	ductile iron
shaft:	stainless steel
handwheel:	steel
protection:	IP65
T:	-20 / +120 °C

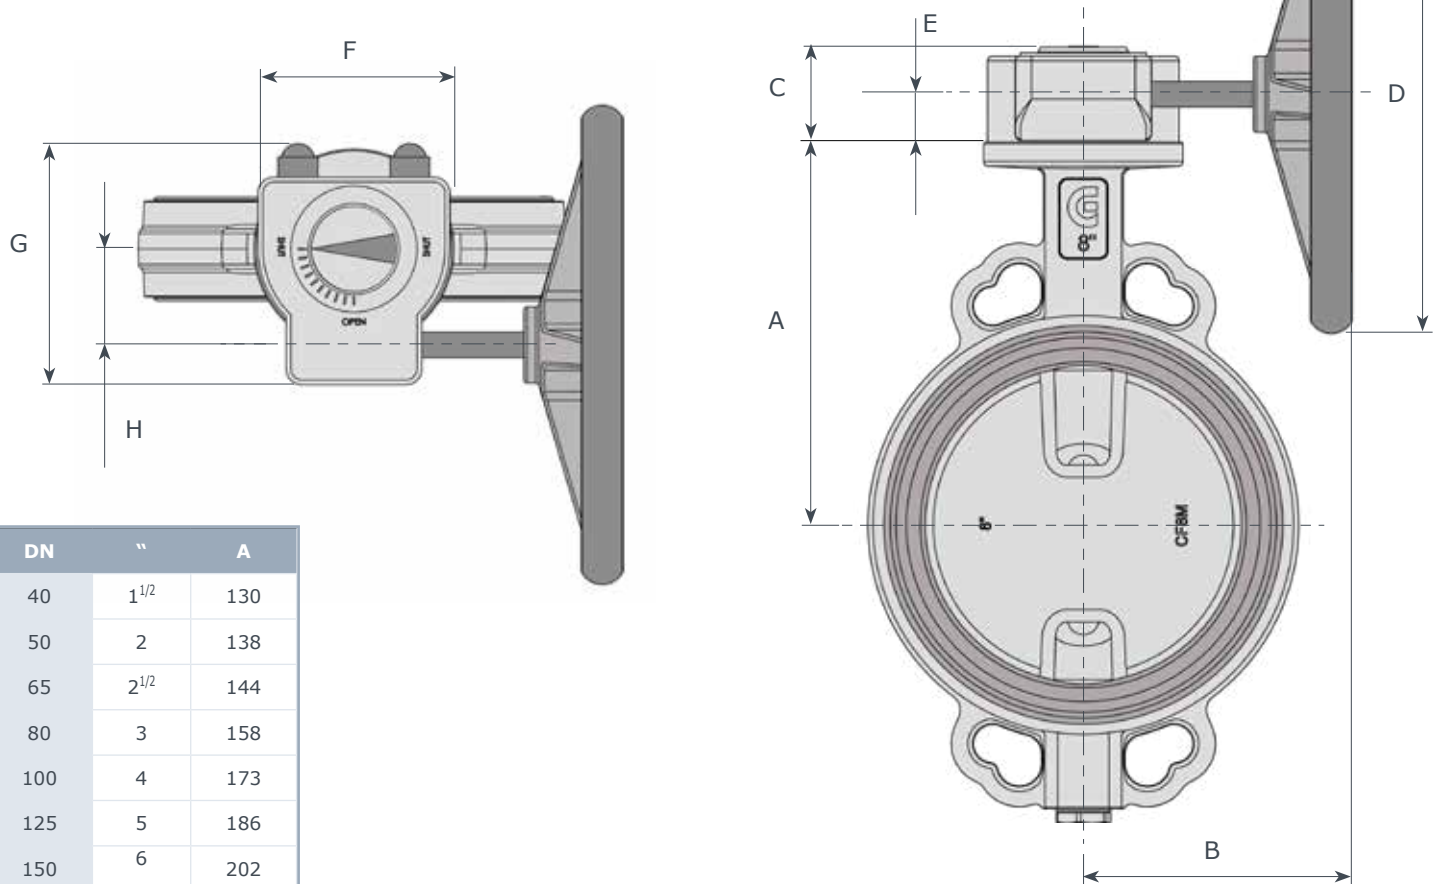

DN	"	A
40	1 ^{1/2}	130
50	2	138
65	2 ^{1/2}	144
80	3	158
100	4	173
125	5	186
150	6	202
200	8	240
250	10	270
300	12	300
350	14	330
400	16	355

Mod.	B	C	D	E	F	G	H	Kg
HW070	165	48	140	27	80	115	42	1.6
HW102	240	56	300	33	120	150	60	3
HW140	250	95	400	51	185	225	80	10

Gearboxes Cast Iron body - GH/AB Series

Coupling valve - actuators

DN	"	PD	KI	KA	KX	DN	"	A
40	1 1/2	--	GH10	GH10	GH10	40	1 1/2	130
50	2	--	GH10	GH10	GH10	50	2	138
65	2 1/2	--	GH10	GH10	GH10	65	2 1/2	144
80	3	GH10	GH10	GH10	GH10	80	3	158
100	4	GH10	GH10	GH10	GH10	100	4	173
125	5	GH10	GH10	GH10	GH10	125	5	186
150	6	GH10	GH10	GH10	GH20	150	6	202
200	8	GH20	GH20	GH20	GH20	200	8	240
250	10	GH20	GH20	GH20	AB550	250	10	270
300	12	GH20	GH20	AB550	--	300	12	300
350	14	GH30	GH30	AB880	--	350	14	330
400	16	GH30	GH30	AB880	--	400	16	355
450	18	GH55	GH55	AB1250	--	450	18	400
500	20	GH55	GH55	AB1250	--	500	20	422
600	24	GH88	GH88	AB1954	--	600	24	495
700	28	GH99	GH99	AB6804	--	700	28	550
800	32	GH99	GH195	AB6806	--	800	32	640

GH/AB series


body:	ductile iron
worm gears:	steel
sector gear:	ductile iron
shaft:	steel
handwheel:	steel
protection:	IP67
T:	-20 / +80 °C

low/high temperature execution on request

Waterproof valve shaft extension


When necessary, it's possible to extend the valve shaft as indicated in the figure. Construction is in carbon steel with protective paint (on request stainless steel).

"L" measure should be indicated when ordering.

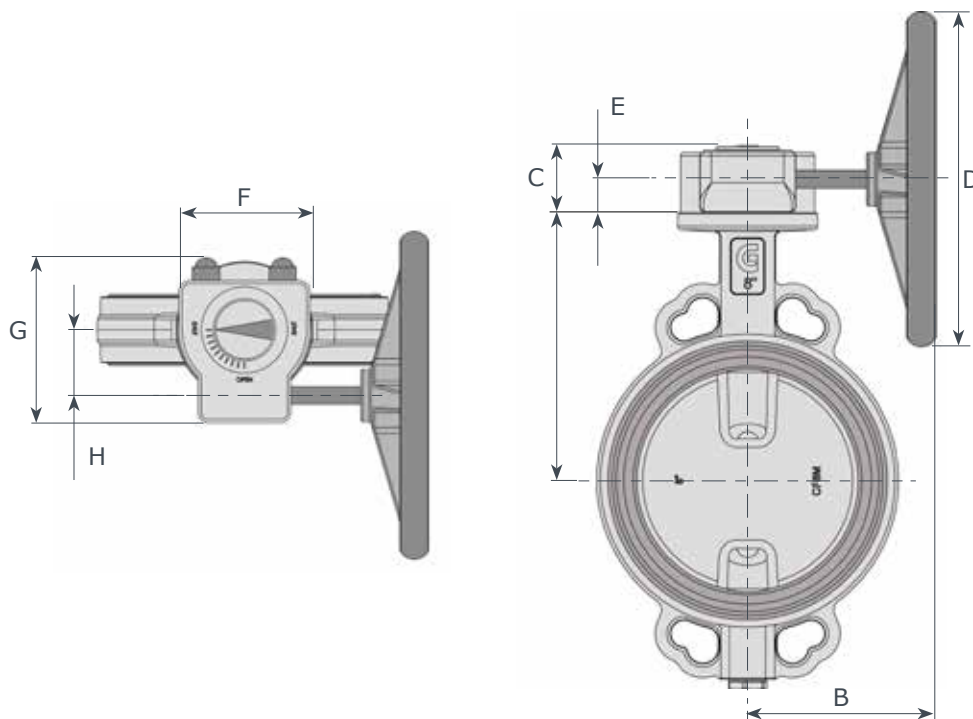

Mod. GH	B	C	D	E	F	G	H	I	Kg
GH10	170	64	200	29	90	122.5	44	52.5	2.2
GH20	179	65.5	200	29	125	144	52	65	3.6
GH21	214	73	300	36	125	162	62	74	4.8
GH30	265	89	350	46	150	202	79	89	12
GH55	300	99	400	49.5	210	229	89	105	13
GH88	350	350	500	55	225	267	112	112	20.1
GH99	374	374	500	55	300	317	124	150	28.5
GH195	430	430	600	63	300	350	129	150	37

Mod. AB	B	C	D	E	F	G	H	I	Kg
AB550	282	88	300	41	138	174	71	69	8.5
AB880	282	93	400	42	200	226	86	100	14
AB1250	322	102	500	48	220	258	105	110	22
AB1950	425	126	600	55	285	323	130	143	32
AB1954	398	126	600	55	285	323	130	143	39
AB6804	451	159	600	59	370	407	182	170	62.5
AB6806	451	159	600	59	370	407	182	170	64.2

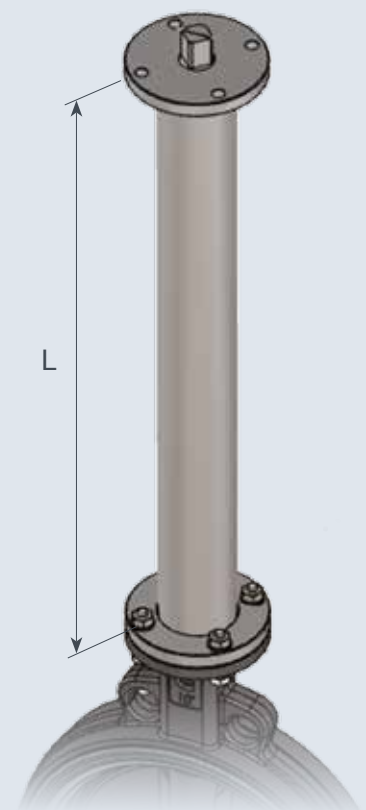

Our technical department is available to solve special applications.

Pneumatic actuator DA / DOUBLE ACTING

Rack & Pinion Actuators


Max air pressure: 8 bar - 5,5 bar (AT series) Torque range: 8/5059 Nm Double travel stop open/close: $\pm 5^\circ$
 Temperature: -20/+85°C 13,2/9173 Nm a 5,5 bar -5°/+15 close (serie AT)
 -20/+80°C (AT series) (AT series) +5°/-15 open (serie AT)

valve seat: EPDM/NBR fluid: H₂O T: 20°C operating air pressure: ≥ 5.5 bar

DN	"	M	PD				KI						KA		KX	
			P=6 B	G	P=10 B	G	P=6 B	G	P=10 B	G	P=16 B	G	mod.	G	mod.	G
40	1½	130	≈	≈	≈	≈	VA 52	24	VA 52	24	VA 52	24	VA 52	24	≈	≈
50	2	138	≈	≈	≈	≈	VA 52	24	VA 52	24	VA 52	24	VA 63	24	VA 63	20
65	2½	144	≈	≈	≈	≈	VA 52	24	VA 52	24	VA 63	20	VA 63	20	VA 75	16
80	3	158	VA 52	24	VA 52	24	VA 75	16	VA 75	16	VA 75	16	VA 75	16	VA 75	16
100	4	173	VA 52	24	VA 63	20	VA 75	16	VA 75	16	VA 75	16	VA 85	16	VA 85	16
125	5	186	VA 75	16	VA 75	16	VA 75	16	VA 75	16	VA 85	16	VA 100	16	VA 100	16
150	6	202	VA 75	16	VA 75	16	VA 85	16	VA 100	16	VA 100	16	VA 100	16	VA 100	16
200	8	240	VA 85	20	VA 100	20	VA 100	20	VA 115	20	VA 125	14	VA 125	14	VA 140	14
250	10	270	VA 115	14	VA 115	14	VA 115	14	VA 125	14	VA 140	14	VA 140	14	VA 160	14
300	12	300	VA 115	14	VA 140	14	VA 140	14	VA 140	14	VA 160	14	VA 160	14	≈	≈
350	14	330	VA 140	0	VA 160	0	VA 160	0	VA 180	0	VA 200	0	VA 230	100	≈	≈
400	16	355	VA 160	0	VA 160	0	VA 160	0	VA 180	0	VA 200	0	VA 230	100	≈	≈
450	18	400	VA 180	0	VA 180	0	VA 180	0	VA 200	0	VA 230	0	VA 270	100	≈	≈
500	20	422	VA 180	0	VA 180	0	VA 180	0	VA 200	0	VA 270	0	VA 330	0	≈	≈
600	24	495	VA 270	100	≈	≈	VA 270	100	VA 330	100	≈	≈	AT 1001	100	≈	≈
700	28	550	VA 270	100	≈	≈	VA 330	150	VA 330	150	≈	≈	≈	≈	≈	≈
800	32	640	VA 330	150	≈	≈	VA 330	150	VA 330	150	≈	≈	≈	≈	≈	≈

valve seat: EPDM/NBR fluid: Aria T: 20°C operating air pressure: ≥ 5.5 bar
 valve seat: FKM (n.a. for PD 10bar) fluid: H₂O

DN	"	M	PD				KI					
			P=6 B	G	P=10 B	G	P=6 B	G	P=10 B	G	P=16B	G
40	1½	130	≈	≈	≈	≈	VA 52	16	VA 52	24	VA 63	20
50	2	138	≈	≈	≈	≈	VA 52	24	VA 63	20	VA 63	20
65	2½	144	≈	≈	≈	≈	VA 63	20	VA 63	20	VA 63	20
80	3	158	VA 52	24	VA 52	24	VA 75	16	VA 75	16	VA 75	16
100	4	173	VA 52	24	VA 75	20	VA 75	16	VA 85	16	VA 85	16
125	5	186	VA 75	16	VA 75	16	VA 85	16	VA 85	16	VA 100	16
150	6	202	VA 85	16	VA 85	16	VA 85	16	VA 100	16	VA 100	16
200	8	240	VA 85	20	VA 100	29	VA 115	20	VA 125	14	VA 125	14
250	10	270	VA 115	14	VA 115	14	VA 125	14	VA 140	14	VA 160	14
300	12	300	VA 125	14	VA 140	14	VA 140	14	VA 160	14	VA 160	14
350	14	330	VA 150	0	VA 180	0	VA 180	0	VA 200	0	VA 230	100
400	16	355	VA 180	0	VA 180	0	VA 180	0	VA 200	0	VA 230	100
450	18	400	VA 180	0	VA 180	0	VA 180	0	VA 200	0	VA 230	0
500	20	422	VA 200	0	VA 200	0	VA 200	0	VA 230	0	VA 270	0
600	24	495	VA 270	100	≈	≈	VA 330	100	VA 330	100	≈	≈
700	28	550	VA 330	100	≈	≈	VA 330	150	AT 1001	150	≈	≈
800	32	640	VA 330	150	≈	≈	VA 330	150	AT 1001	150	≈	≈

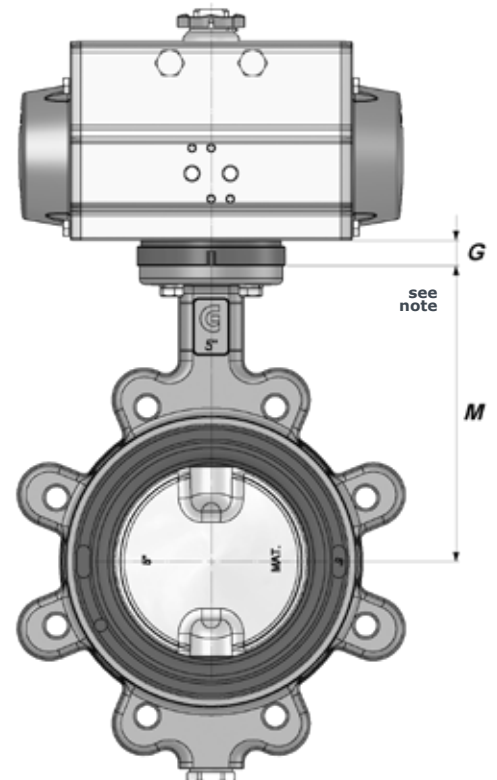

G dimension can change depending on valve/actuator coupling.

Pneumatic actuator SR / SPRING RETURN


Rack & Pinion Actuators

Max air pressure: 8 bar - 5,5 bar (AT series) Torque range: 8/5059 Nm Double travel stop open/close: ±5°
 Temperature: -20/+85°C 13,2/9173 Nm a 5,5 bar -5°/+15 close (serie AT)
 -20/+80°C (AT series) (AT series) +5°/-15 open (serie AT)

valve seat: EPDM/NBR			fluid: H ₂ O				T: 20°C				operating air pressure: ≥5.5 bar					
DN	"	M	PD				KI				KA		KX			
			P=6 B	G	P=10 B	G	P=6 B	G	P=10 B	G	P=16 B	G	mod.	G	mod.	G
40	1½	130	≈	≈	≈	≈	VA 75 SR	16	VA 75 SR	16	VA 75 SR	24	VA 75 SR	16	≈	≈
50	2	138	≈	≈	≈	≈	VA 75 SR	16	VA 75 SR	16	VA 75 SR	24	VA 75 SR	16	VA 85 SR	16
65	2½	144	≈	≈	≈	≈	VA 75 SR	16	VA 75 SR	16	VA 75 SR	20	VA 85 SR	16	VA 100 SR	16
80	3	158	VA 63 SR	20	VA 75 SR	16	VA 85 SR	16	VA 100 SR	16	VA 100 SR	16	VA 100 SR	16	VA 115 SR	16
100	4	173	VA 75 SR	24	VA 85 SR	20	VA 100 SR	16	VA 115 SR	16	VA 115 SR	16	VA 115 SR	16	VA 115 SR	16
125	5	186	VA 100 SR	16	VA100 SR	16	VA 115 SR	16	VA 115 SR	16	VA 125 SR	16	VA 125 SR	16	VA 125 SR	16
150	6	202	VA 100 SR	16	VA 115 SR	16	VA 115 SR	16	VA 125 SR	16	VA 125 SR	16	VA 140 SR	16	VA 140 SR	16
200	8	240	VA 115 SR	14	VA 125 SR	14	VA 140 SR	14	VA 160 SR	14	VA 160 SR	14	VA 180 SR	14	VA 200 SR	14
250	10	270	VA 140 SR	14	VA 140 SR	14	VA 160 SR	14	VA 180 SR	50	VA 200 SR	50	VA 200 SR	50	VA 230 SR	50
300	12	300	VA 160 SR	14	VA 180 SR	50	VA 180 SR	50	VA 200 SR	50	VA 200 SR	50	VA 230 SR	50	≈	≈
350	14	330	VA 200 SR	0	VA 200 SR	0	VA 230 SR	100	VA 230 SR	100	VA 270 SR	100	VA 330 SR	100	≈	≈
400	16	355	VA 200 SR	0	VA 230 SR	100	VA 230 SR	100	VA 270 SR	100	VA 270 SR	100	VA 330 SR	100	≈	≈
450	18	400	VA 230 SR	0	VA 230 SR	0	VA 230 SR	0	VA 270 SR	100	VA 330 SR	100	AT 1001 SR	100	≈	≈
500	20	422	VA 230 SR	0	VA 230 SR	0	VA 230 SR	0	VA 270 SR	0	VA 330 SR	0	AT 1001 SR	0	≈	≈
600	24	495	VA 330 SR	100	≈	≈	AT 1001 SR	100	AT 1001 SR	100	≈	≈	≈	≈	≈	≈
700	28	550	AT 1001 SR	150	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈
800	32	640	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈

valve seat: EPDM/NBR			fluid: Aria				T: 20°C				operating air pressure: ≥5.5 bar			
valve seat: FKM (n.a. for PD 10bar)			fluid: H ₂ O											

DN	"	M	PD				KI					
			P=6 B	G	P=10 B	G	P=6 B	G	P=10 B	G	P=16B	G
40	1½	130	≈	≈	≈	≈	VA 75 SR	16	VA 75 SR	16	VA 75 SR	16
50	2	138	≈	≈	≈	≈	VA 75 SR	16	VA 75 SR	16	VA 75 SR	16
65	2½	144	≈	≈	≈	≈	VA 85 SR	16	VA 85 SR	16	VA 85 SR	16
80	3	158	VA 75 SR	16	VA 75 SR	16	VA 100 SR	16	VA 115 SR	16	VA 115 SR	16
100	4	173	VA 75 SR	16	VA 100 SR	16	VA 115 SR	16	VA 115 SR	16	VA 125 SR	16
125	5	186	VA 100 SR	16	VA 115 SR	16	VA 115 SR	16	VA 115 SR	16	VA 125 SR	16
150	6	202	VA 115 SR	16	VA 115 SR	16	VA 125 SR	16	VA 140 SR	16	VA 140 SR	14
200	8	240	VA 125 SR	16	VA 140 SR	14	VA 160 SR	14	VA 180 SR	50	VA 180 SR	50
250	10	270	VA 160 SR	14	VA 160 SR	14	VA 180 SR	50	VA 180 SR	50	VA 200 SR	50
300	12	300	VA 180 SR	50	VA 200 SR	14	VA 200 SR	50	VA 200 SR	50	VA 230 SR	50
350	14	330	VA 230 SR	100	VA 230 SR	100	VA 230 SR	100	VA 270 SR	100	VA 270 SR	100
400	16	355	VA 230 SR	100	VA 230 SR	100	VA 230 SR	100	VA 270 SR	100	VA 330 SR	100
450	18	400	VA 270 SR	100	VA 230 SR	0	VA 270 SR	100	VA 270 SR	100	VA 330 SR	100
500	20	422	VA 270 SR	0	VA 230 SR	0	VA 270 SR	0	VA 330 SR	0	AT 1001 SR	0
600	24	495	AT 1001 SR	150	≈	≈	≈	≈	≈	≈	≈	≈
700	28	550	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈
800	32	640	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈

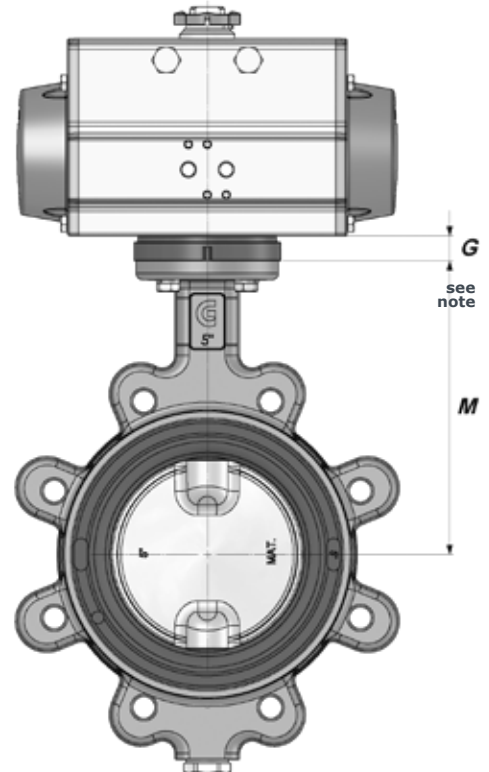


G dimension can change depending on valve/actuator coupling.



Declutchable manual gearboxes

GD Series			
body:	aluminium	shaft:	stainless steel
worm gears:	steel	handwheel:	steel
sector gear:	ductile iron	protection:	IP65
		T:	-20 / +120 °C
∅ valve	DA actuator double action	SR actuator spring return	emergency gearbox type
DN040-150	VA 75-100	VA 75-115	GD070
		VA 125	GD102
DN200	VA 85-100		GD070
DN200-300	VA 115-160	VA 115-160	GD102
		VA 180-200	GD140
DN350-500	VA 140-200	VA 200	GD140

ILGD Series			
body:	ductile iron GGG40	shaft:	steel
worm gears:	steel	handwheel:	steel
sector gear:	ductile iron	protection:	IP65 (IP67 on req.)
		T:	-20 / +120 °C
∅ valve	DA actuator double action	SR actuator spring return	emergency gearbox type
DN 40÷150	VA 63-100	VA 63-100	ILGD200
	VA 115-125	VA 115-160	ILGD600
		VA 180-200	ILGD900
DN 200÷300	VA 85-160	VA 115-160	ILGD600
	VA 180-200	VA 180-200	ILGD900
	VA 230	VA 230	ILGD1500
DN 350÷400	VA 140-200	VA 200	ILGD900
	VA 230	VA 230	ILGD1500
	VA 270	270	ILGD2400
DN 450	VA 180-230	VA 230	ILGD1500
	VA 270	VA 270-330	ILGD2400
DN 500	VA 180-230	VA 230	ILGD1500
	VA 270	VA 270	ILGD2400
	VA 330	VA 330	ILGD5000
DN 600	VA 270		ILGD2400
	VA 330	VA 330	ILGD5000
DN 700	VA 270-330-AT1001		ILGD5000
		AT1001	ILGD16000
DN 800	VA 330-AT1001		ILGD16000

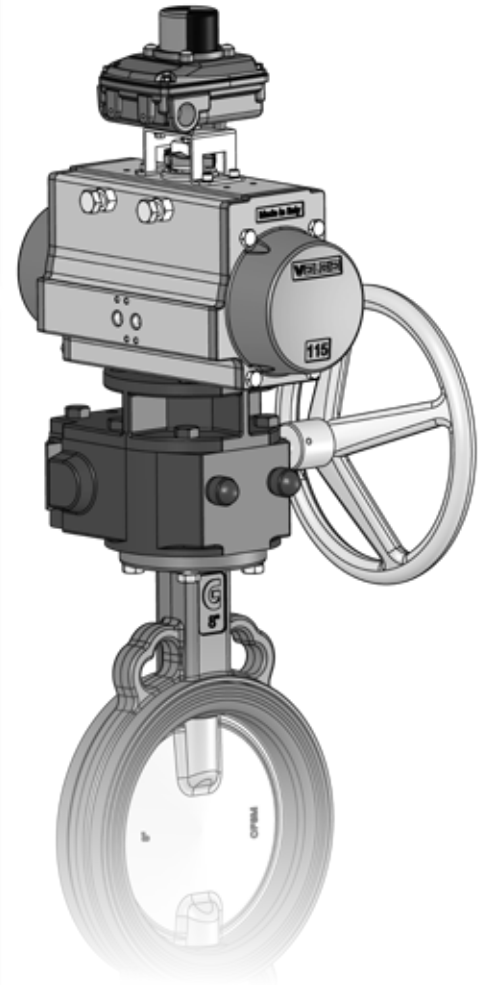


Hydraulic actuators ARES

- Technical features:
 - » ductile iron cast body
 - » steel rack and pinion
 - » NBR seats
- fluid material:
 - » hydraulic oil type : HPL DIN51524-2 / ISO 6743-4. Viscosity 15/200 cst
- working pressure: 10 - 120 bar
- working temperature: -20°C / +80°C

Compact design, 90° rotation ±5°,
Travel adjustment in both direction
of rotation, Flange ISO 5211,
Double or single acting with spring return

DN	40	50	65	80	100	125	150	200	250
M	130	138	148	158	173	186	202	240	270
DN	300	350	400	450	500	600	700	800	
M	300	330	355	400	422	495	550	640	

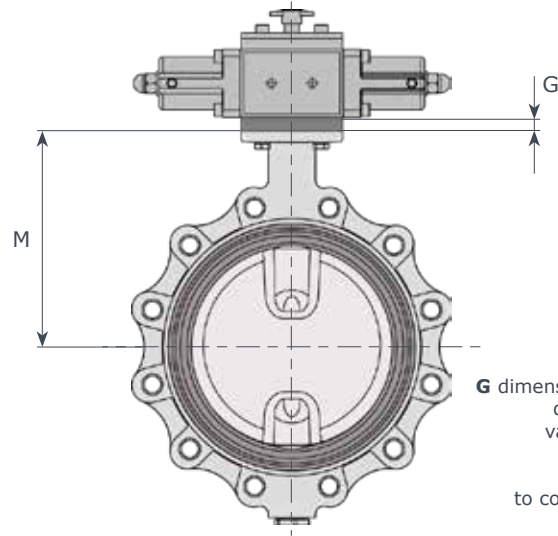


G dimension can vary depending on valve/actuator coupling. Pls refer to coupling tables


valve seat: NBR / EPDM - Fluid H₂O - T = 20°C - oil pressure: 60 Bar

DN	"	DA type - Double Acting								SR type - Spring close							
		PD series	G	KI series	G	KA series	G	KX series	G	PD series	G	KA series	G	KA series	G	KX series	G
40	1 ^{1/2}	≈	≈	H 28	0	H 28	0	≈	≈	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0	≈	≈
50	2	≈	≈	H 28	0	H 28	0	H 28	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0
65	2 ^{1/2}	≈	≈	H 28	0	H 28	0	H 28	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0
80	3	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0
100	4	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRA	0	H 40 SRA	0	H 40 SRA	0	H 50 SRA	14
125	5	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRA	0	H 50 SRA	14	H 50 SRA	14	H 50 SRA	14
150	6	H 28	0	H 28	0	H 40	0	H 40	0	H 40 SRA	0	H 50 SRA	14	H 50 SRA	14	H 50 SRA	14
200	8	H 50	0	H 50	0	H 50	0	H 63	50	H 50 SRA	0	H 63 SRA	50	H 63 SRA	50	H 80 SRA	100
250	10	H 50	0	H 50	0	H 50	0	H 63	50	H 50 SRA	0	H 80 SRA	100	H 80 SRA	100	H 80 SRA	100
300	12	H 50	0	H 63	50	H 63	50	≈	≈	H 63 SRA	50	H 80 SRA	100	H 80 SRA	100	≈	≈
350	14	H 63	100	H 80	100	H 80	100	≈	≈	H 80 SRA	100	≈	≈	≈	≈	≈	≈
400	16	H 80	100	H 80	100	≈	≈	≈	≈	H 80 SRA	100	≈	≈	≈	≈	≈	≈
450	18	H 80	100	H 80	100	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈
500	20	H 80	100	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈
600	24	a ric.	a ric.	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈

valve seat: NBR / EPDM - Fluid H₂O - T = 20°C - oil pressure: 120 Bar

DN	"	DA type - Double Acting								SR type - Spring close							
		PD series	G	KI series	G	KA series	G	KX series	G	PD series	G	KA series	G	KA series	G	KX series	G
40	1 ^{1/2}	≈	≈	H 28	0	H 28	0	≈	≈	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
50	2	≈	≈	H 28	0	H 28	0	H 28	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
65	2 ^{1/2}	≈	≈	H 28	0	H 28	0	H 28	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
80	3	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
100	4	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
125	5	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
150	6	H 28	0	H 28	0	H 28	0	H 28	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0	H 40 SRB	0
200	8	H 50	0	H 50	0	H 50	0	H 50	0	H 50 SRB	0	H 50 SRB	0	H 50 SRB	0	H 63 SRB	50
250	10	H 50	0	H 50	0	H 50	0	H 50	0	H 50 SRB	0	H 63 SRB	50	H 63 SRB	50	H 63 SRB	50
300	12	H 50	0	H 50	0	H 50	0	≈	≈	H 50 SRB	0	H 63 SRB	50	H 63 SRB	50	≈	≈
350	14	H 63	100	H 63	100	H 63	100	≈	≈	H 63 SRB	100	H 80 SRB	100	≈	≈	≈	≈
400	16	H 63	100	H 63	100	H 63	100	≈	≈	H 63 SRB	100	H 80 SRB	100	≈	≈	≈	≈
450	18	H 80	100	H 80	100	H 80	100	≈	≈	H 80 SRB	100	≈	≈	≈	≈	≈	≈
500	20	H 80	100	H 80	100	≈	≈	≈	≈	H 80 SRB	100	≈	≈	≈	≈	≈	≈
600	24	a ric.	a ric.	H 80	100	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈
700	28	H 80	100	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈	≈

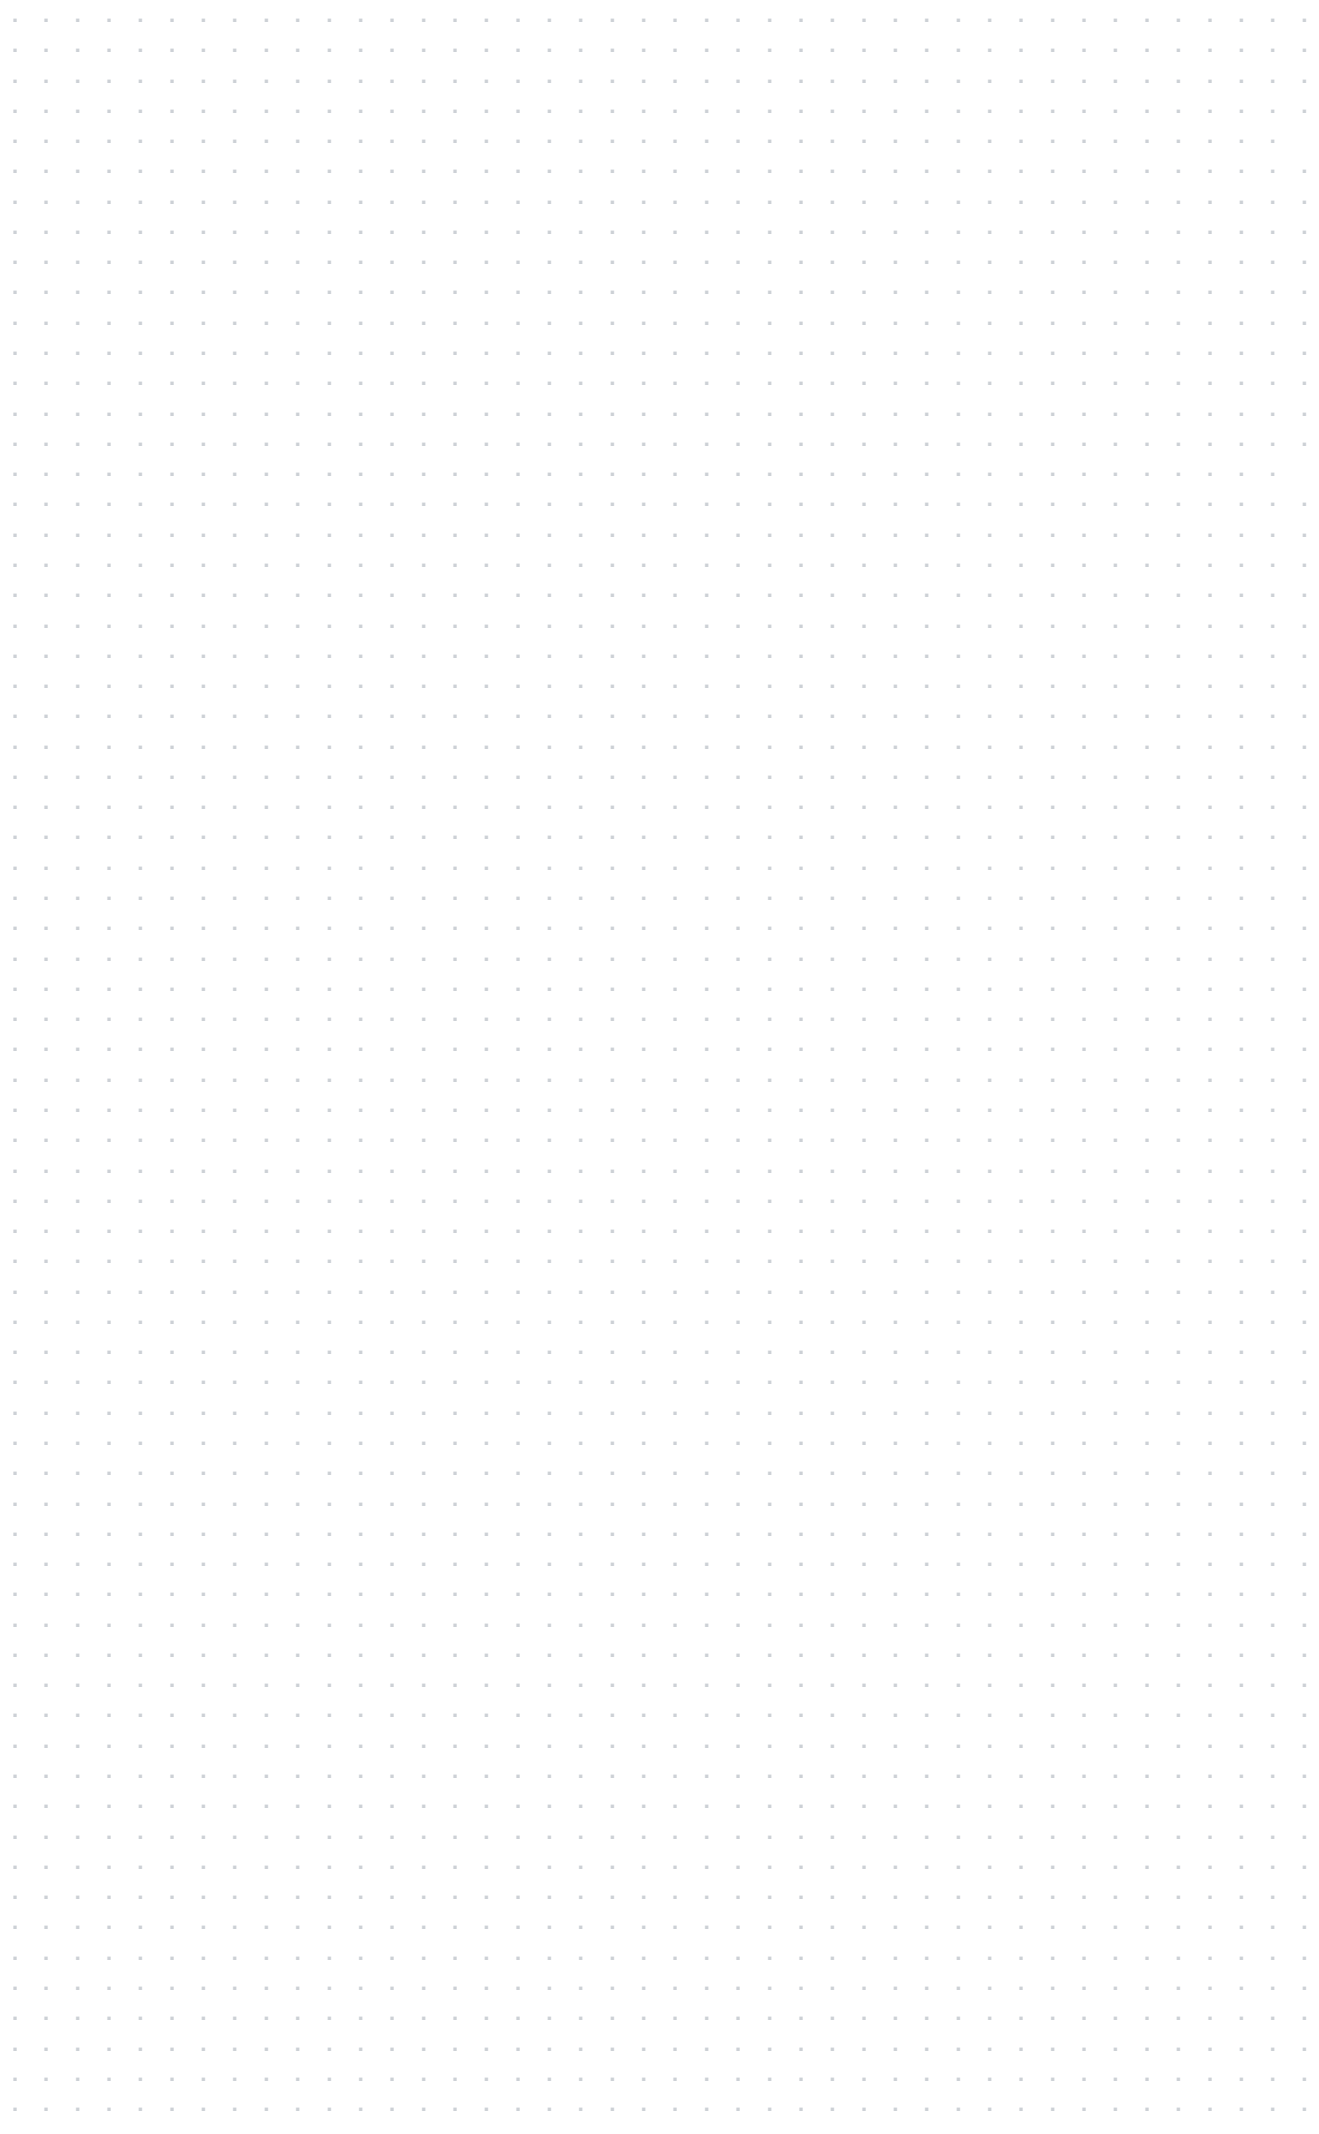

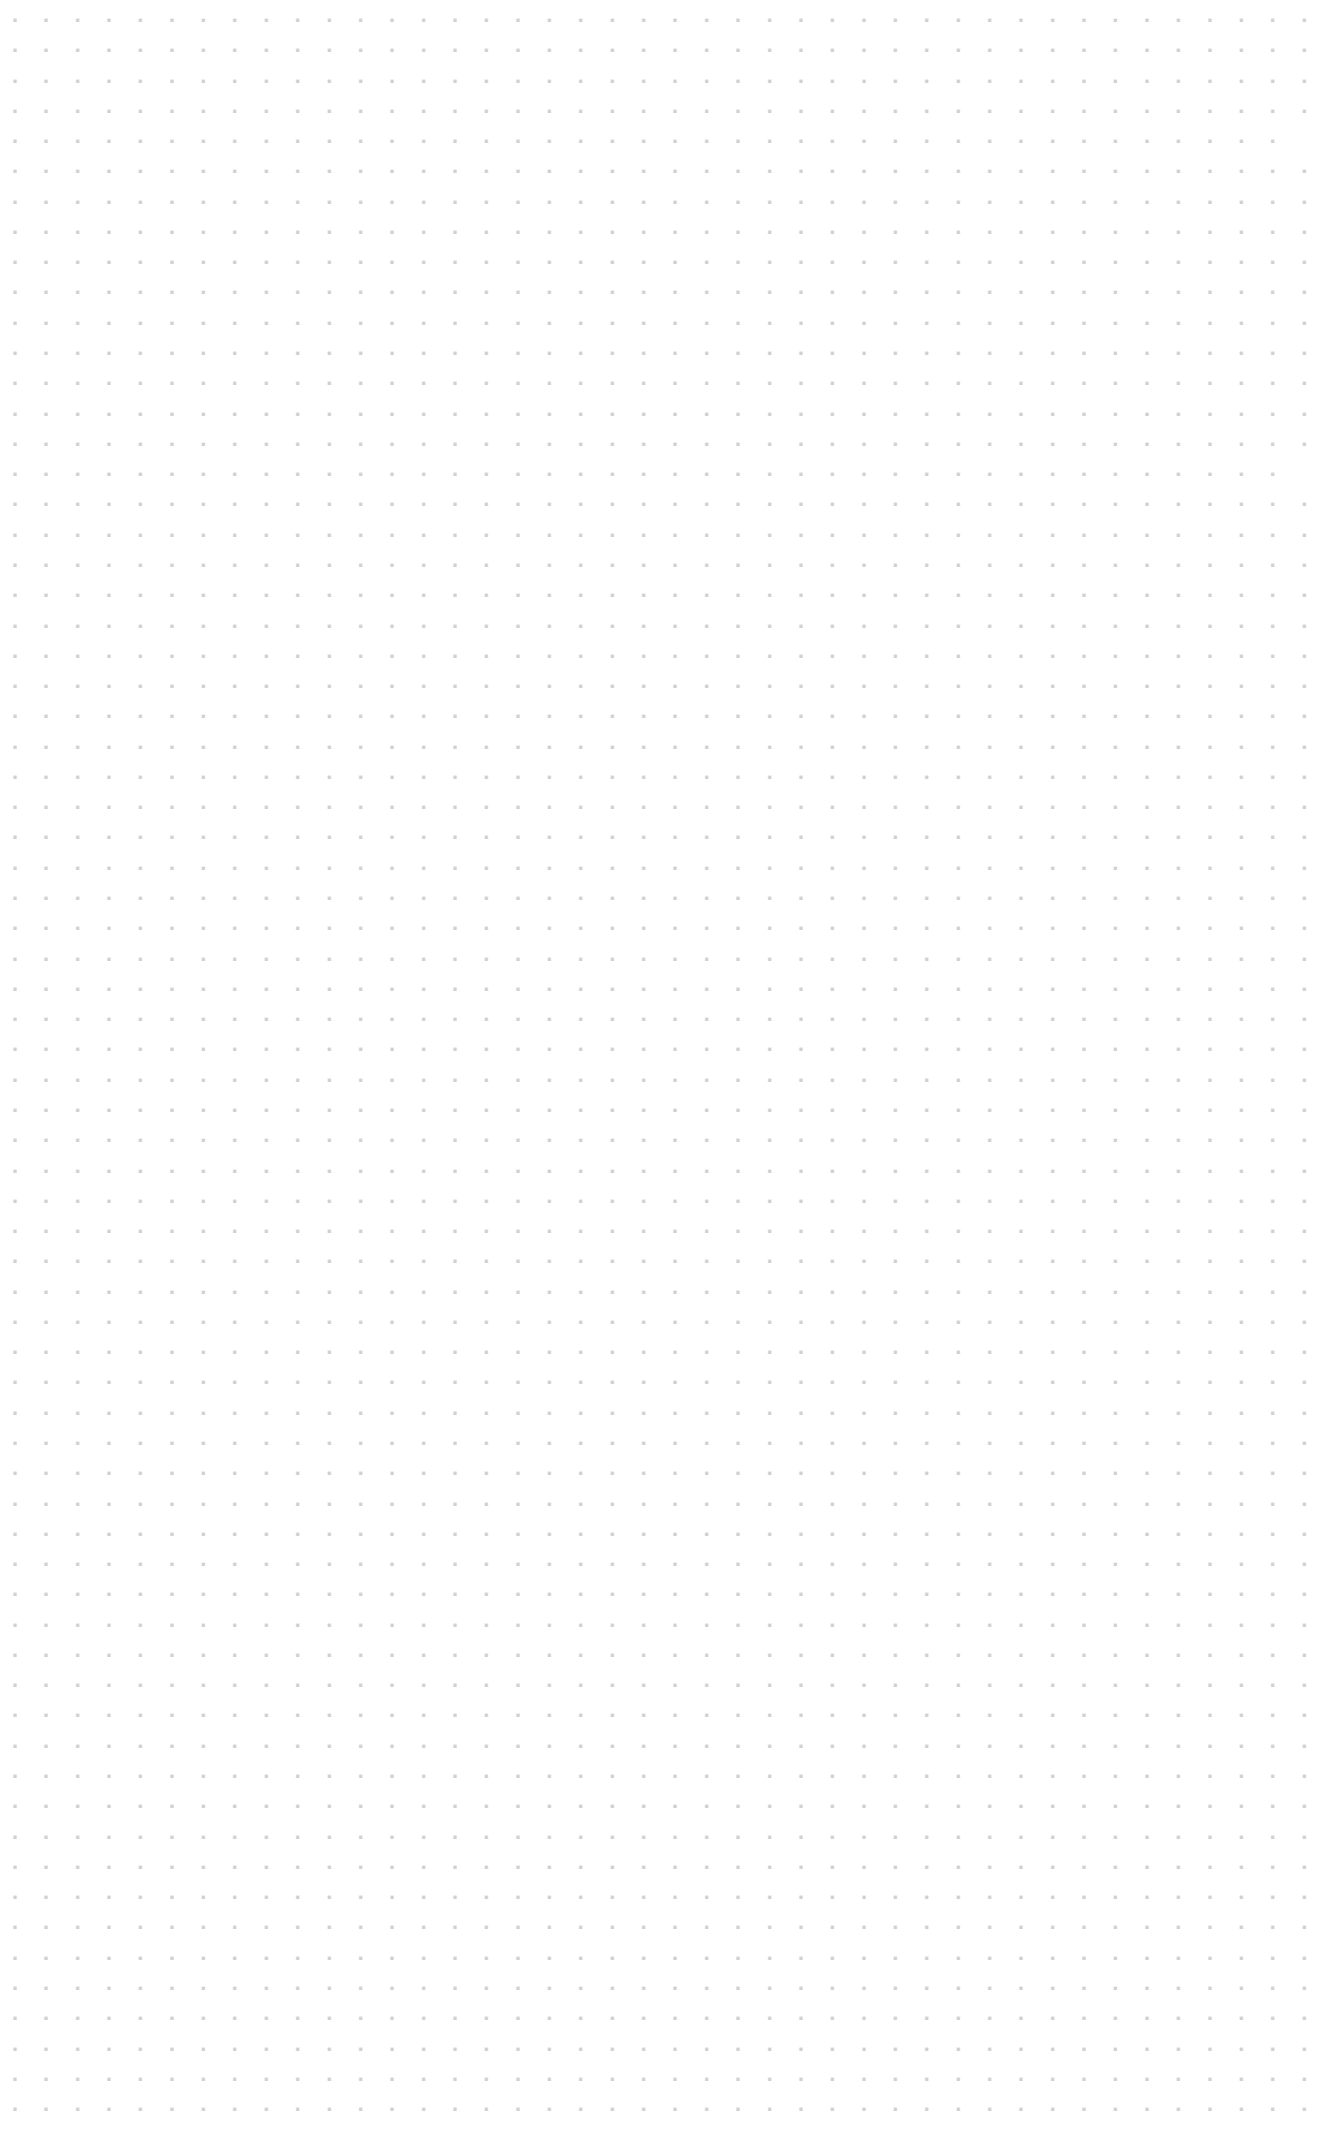



MORE THAN 40 YEARS OF HIGH QUALITY EXPERIENCE

Ghibson Italia can now boast of more than 40 years of experience in manufacturing of industrial valves. In these 40 years we have designed and manufactured in our facilities in Italy butterfly valves and check valves, for the most different industrial applications.

We export our products all over the world always providing our customers with the best assistance during all the phases: design, installation, maintenance.

MARKET SEGMENTS and APPLICATIONS

Marine
Water Treatment
Pulp & Paper
Power Plant
Nuclear Plant
HVAC
Chemical & Petrochemical
Powder Conveying Systems
Food & Beverage

Steam isolation - Vacuum service - Refining
Cooling Water systems - Metallurgical processes
Powder transportation & storage
Oil field recovery - Liquid natural gas
Steam service - Steam Turbine
Saltwater Service - District heating & cooling
Hot Air & Smokes
Chemicals storage & transportation
Food & Beverage processes

DEPARTMENTS

- RESEARCH & DEVELOPMENT
- DESIGN
- CUSTOMIZATION
- PRODUCTION & LOGISTIC
- SALES & MARKETING
- QUALITY CONTROL
- CERTIFICATIONS
- PACKING AND SHIPPING
- AFTER SALES SUPPORT

WIDE RANGE OF PRODUCTS

Very large choice of materials including valves of every alloy of carbon or stainless steel, bronze, aluminium, as well as with PTFE or Polypropylene.

We manufacture rubber seated valves with many elastomer types (EPDM, NBR, FKM, Silicone, Carboxidate among others), as well as PTFE, RTFE seated valves with many different coatings such as Halar, Rilsan, PFA, Chenisil, etc.

We can offer a total assistance:

- before selling we can start from dimensioning the valves and actuators, make selection of materials for all parts upon knowing the specification, prepare all types of drawings etc.
- after selling we make final documentation, provide installation supervision, undertake commissioning etc.

BUTTERFLY VALVES

Rubber Seated
PTFE Seated
High Performance
Damper Valves

ACTUATORS & OPTIONS

Pneumatic - Electric -
Hydraulic

CONTROL SYSTEMS

CUSTOMIZED VALVES

CHECK VALVES
Disc type - Swing type
Dual plate

CERTIFICATIONS





GHIBSON valves

*not just valves,
but solutions*



Ghibson Italia srl

Via Dozza, 2 40069 Zola Predosa BO Italy
tel +39 051 835711 info@ghibson.it

ghibsonvalves.com